


T-HAARA SUPISTETTU LYHYT MEIJERI, HST, SMS

Materiaali: EN 1.4404, AISI 316L
Pinta: Puolikiiltävä, 0,8 µm
Malli: Lyhyt, vedetty, supistettu haara



SAP	Koodi	D1	D2	S1	S2	L0	L1
CFS207	DT12342527	38,0 mm	25,0 mm	1,2 mm	1,2 mm	70,0 mm	22,0 mm
CFS212	DT12343347	51,0 mm	25,0 mm	1,2 mm	1,2 mm	82,0 mm	29,0 mm
CFS213	DT12343356	51,0 mm	38,0 mm	1,2 mm	1,2 mm	82,0 mm	29,0 mm
CFS210	DT12343767	63,5 mm	25,0 mm	1,6 mm	1,2 mm	105,0 mm	35,0 mm
CFS211	DT12343785	63,5 mm	38,0 mm	1,6 mm	1,2 mm	105,0 mm	35,0 mm
CFS216	DT12343800	63,5 mm	51,0 mm	1,6 mm	1,2 mm	105,0 mm	35,0 mm
CFS217	DT12344085	76,1 mm	25,0 mm	1,6 mm	1,2 mm	110,0 mm	41,0 mm
CFS214	DT12344181	76,1 mm	38,0 mm	1,6 mm	1,2 mm	110,0 mm	41,0 mm
CFS215	DT12344250	76,1 mm	51,0 mm	1,6 mm	1,2 mm	110,0 mm	41,0 mm
CFS220	DT12344298	76,1 mm	63,5 mm	1,6 mm	1,6 mm	110,0 mm	41,0 mm
CFS221	DT12344820	101,6 mm	38,0 mm	2,0 mm	1,2 mm	150,0 mm	55,0 mm
CFS218	DT12344868	101,6 mm	51,0 mm	2,0 mm	1,2 mm	150,0 mm	55,0 mm
CFS219	DT12344892	101,6 mm	63,5 mm	2,0 mm	1,6 mm	150,0 mm	55,0 mm
CFS226	DT12344916	101,6 mm	76,1 mm	2,0 mm	1,6 mm	150,0 mm	55,0 mm

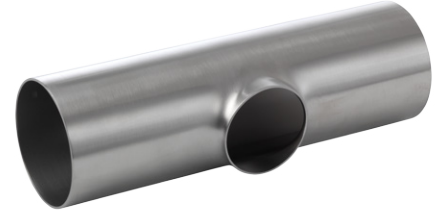