



PRODUCT FEATURES

- Seamless Illumination. No Dark Spots
- Ultra Slim Profile
- Even Surface Illumination
- Spot Free Lens Options
- Multiple Lengths for Easy Configuration
- End to End Snap-In Connection
- Dimmable with 0-10V, Forward/Reverse Phase.
- Other Options Available
- Side-Feed Units for Long Continuous Runs
- Quick Ship Available*

PRODUCT SPECIFICATIONS

- 24VDC Constant Voltage Feelux or Approved Class 2 Drivers
- Operating Temperature: 32-113°F (0-45°C)
- Lamp Life: 50,000 hrs L70
- Available Color: 2700K, 3000K, 3500K, 4000K, 6000K*
- CRI/Ra > 85
- 75 lm/W - 3.5W/ft - 262.5 lm/ft
- IP20 – Damp Location/Closet Approved
- Beam Angle: 95° / Round and Square Lens - 220°
- Finish: Aluminum
- 5 year Warranty
- Product is approved for Closet/Storage space installation per NEC410.16 (A) (3) and NEC410.16 (C)(5) per NRTL certification

* Pending factory availability

DIMENSIONS



FLX Stix NDV 1W 3.93" (100mm)



FLX Stix NDV 3W 7.56" (192mm)



FLX Stix NDV 4W 11.22" (285mm)



FLX Stix NDV 7W 22.25" (565mm)



FLX Stix NDV 11W 33.27" (845mm)




FLX Stix NDV 15W 44.21" (1123mm)




Model Number	Voltage Input (V)	Power Input (W)	A inches (mm)	B inches (mm)	C inches (mm)	D inches (mm)	E inches (mm)	F inches (mm)	G inches (mm)
NDV1-(Color)K-24V	DC 24	1.2	3.74" (95)	3.93" (100)	4.6" (117)	.472 (12)	.433 (11)	.417 (106)	.35 (9)
NDV3-(Color)K-24V	DC 24	2.4	7.4" (188)	7.5" (192)	8.26" (210)	.472 (12)	.433 (11)	.417 (106)	.35 (9)
NDV4-(Color)K-24V	DC 24	3.5	11" (280)	11.2" (285)	11.8" (302)	.472 (12)	.433 (11)	.417 (106)	.35 (9)
NDV7-(Color)K-24V	DC 24	7	22" (560)	22.2" (565)	22.9" (582)	.472 (12)	.433 (11)	.417 (106)	.35 (9)
NDV11-(Color)K-24V	DC 24	10.5	33" (840)	33.2" (845)	33.9" (862)	.472 (12)	.433 (11)	.417 (106)	.35 (9)
NDV15-(Color)K-24V	DC 24	14	44" (1118)	44.2" (1123)	44.9" (1140)	.472 (12)	.433 (11)	.417 (106)	.35 (9)


Fixture w/o connector



Fixture with connector

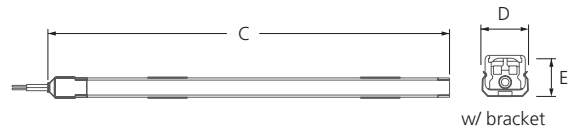


EASY CONNECTION

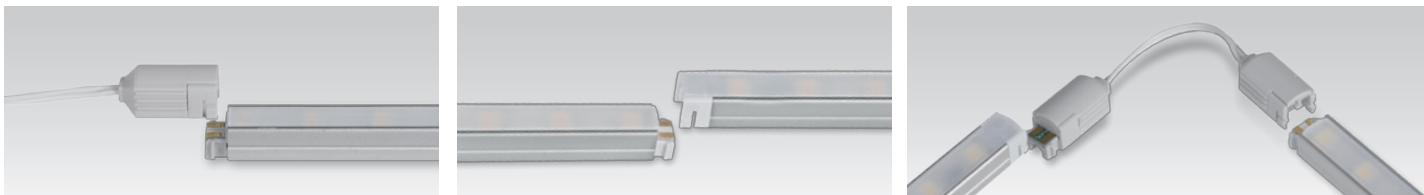


DIFFUSERS

Round Diffuser (optional spot free lens)*

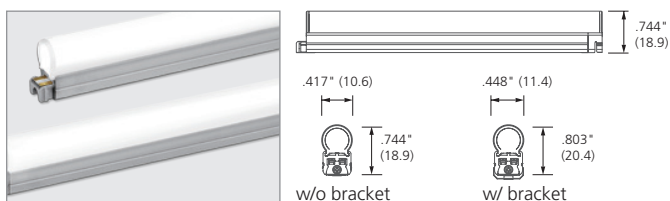


Square Diffuser (optional spot free lens)*


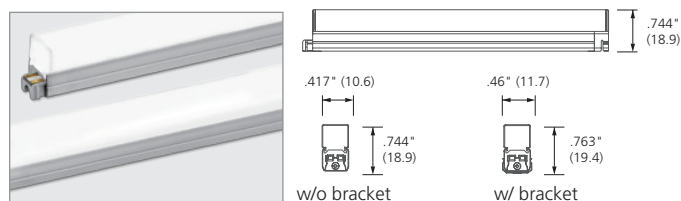


* Not available for Flexible Connecting Fixture

FLEXIBLE CONNECTING FIXTURE

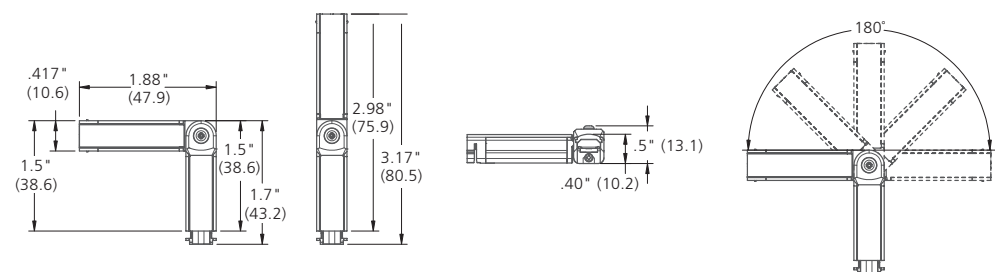


INLINE DIMMER



LED DRIVER OPTIONS

Consult factory for additional options.

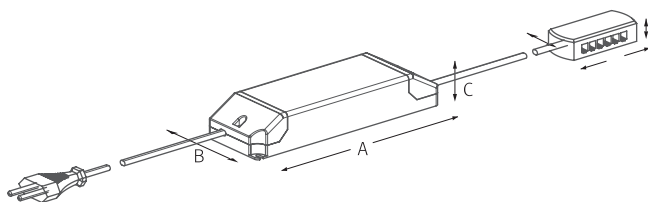


Model Number	A inches (mm)	B inches (mm)	C inches (mm)
FLC30-24V/XL	5.9" (150)	1.6" (41)	1.22" (31)
FLC75-24V/XL	7.08" (180)	2.36" (60)	1.25" (32)
XLD75-124V-FC	11.22" (285)	2.94" (74.7)	1.63" (41.5)
XLD200-224V-FCL-DIM	12.28" (312)	4.46" (113.5)	2.28" (60.5)
XLAV80(L)-124V-SSB	14.4" (366)	4.48" (124)	1.7" (43)


CONNECTION

NO RUN TO EXCEED 55W

IF LONGER RUNS ARE REQUIRED USE SIDE FEED UNIT NDV3-(COLOR)K-24V-S TO CONTINUE SEAMLESS LIGHTING. NOT TO EXCEED 90% OF DRIVER RATED WATTAGE.

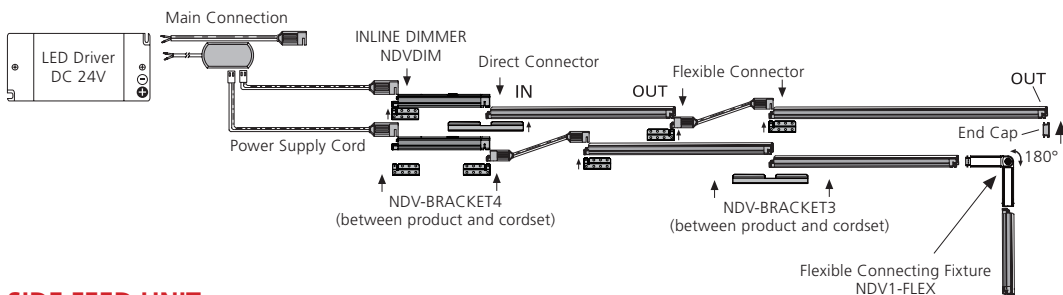


SIDE FEED UNIT

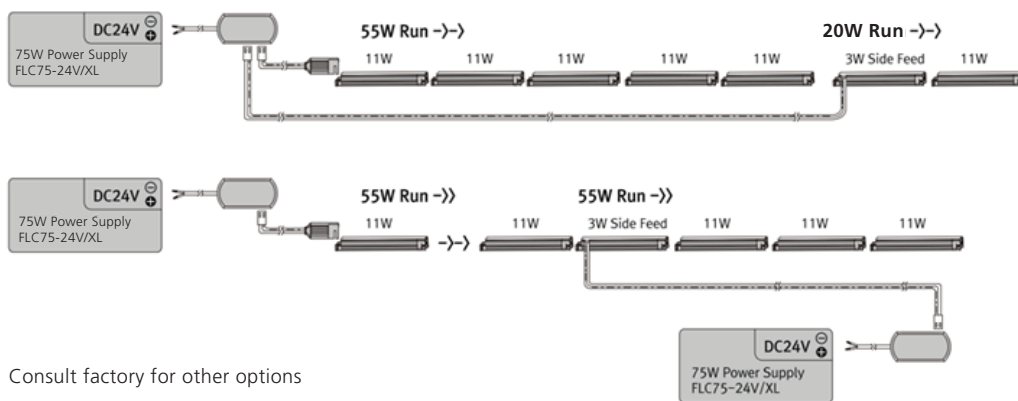

Consult factory for other options

MOUNTING






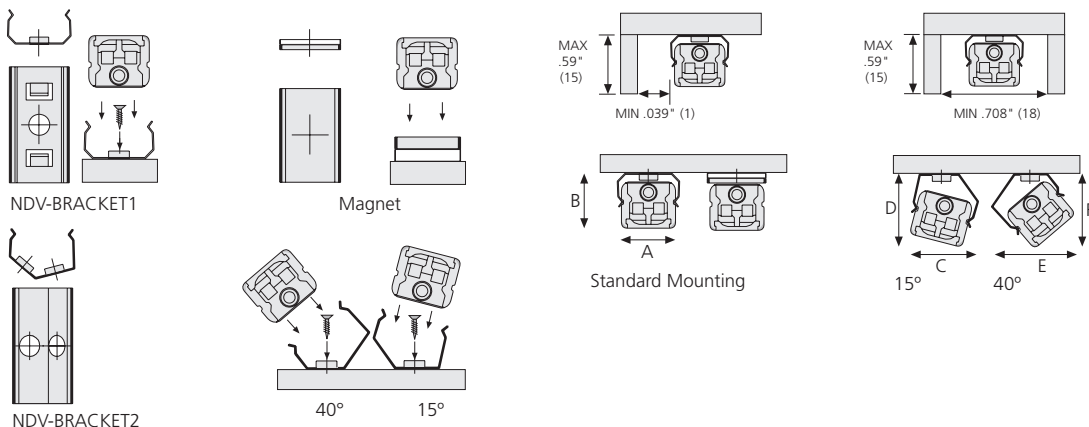


LENS DIMENSION



	A	B	C	D	E	F
Standard	.468" (11.9)	.44" (11.2)	.531" (13.5)	.531" (13.5)	.57" (14.5)	.511" (13)
Round Spot Free	.468" (11.9)	.779" (19.8)	.618" (15.7)	.618" (15.7)	.74" (18.8)	.799" (20.3)
Square Spot Free	.468" (11.9)	.771" (19.6)	.61" (15.5)	.622" (15.8)	.74" (18.8)	.799" (20.3)

BEAM SPREADS



COMPONENTS




Power Cable

- ___ NDVPC (8')
- ___ NDVPC (13')




Sidefeed for Seamless Extension (3W)

- ___ NDV3-(color)K-24V-S



Flexible Connecting Fixture (1W)

- ___ NDV1-(color)K-24V-Flex




Flexible Connecting Cable

- ___ NDVPTC (6")
- ___ NDVPTC1 (1')
- ___ NDVPTC2 (2')
- ___ NDVPTC4 (4')
- ___ NDVPTC6 (6')



In-Line Dimmer

- ___ NDVDIM
- (Max 55W in a row)




Dimming Interface

- Max. 100W (100W/CH, 1CH)
- 0 -10V Signal
- ___ FDC-L10



Square Diffuser

- ___ NDV-1W-SM (4")
- ___ NDV-3W-SM (7.6")
- ___ NDV-4W-SM (1')
- ___ NDV-7W-SM (2')
- ___ NDV-11W-SM (3')
- ___ NDV-15W-SM (4')




Round Diffuser

- ___ NDV-1W-RM (4")
- ___ NDV-3W-RM (7.6")
- ___ NDV-4W-RM (1')
- ___ NDV-7W-RM (2')
- ___ NDV-11W-RM (3')
- ___ NDV-15W-RM (4')



End Cap

- ___ NDV-CAP
- Included with fixture




Metal Mounting Brackets

- ___ NDV-BRACKET1
- Included with fixture



Angled Brackets

- Angled 15°/40° (BK2)
- ___ NDV-BRACKET2
- Optional



Connecting Brackets

- Fixture to Fixture
- ___ NDV-BRACKET3
- Included with fixture



Power Brackets


- Power Feed to Fixture
- ___ NDV-BRACKET4
- Included with NDVPC and NDVPTC

A larger selection of drivers are available including remote and hard wire drivers. Please consult factory.



LED Drivers

- with distributor and power cord (1800mm)
- ___ FLC30-24V/XL
- ___ FLC75-24V/XL



Hard Wire Driver

- (90V to 300V)
- ___ XLAV80(L)-124V-SSB
- ___ XLD200-224V-FCL-DIM
- ___ XLD75-124V-FC



Justin Drivers

- ___ 481-24DCR
- ___ 483-24DCR-277
- ___ 961-24DCR
- ___ 963-24DCR-277
- ___ C2240-24DCR
- ___ C2240-24DCR-277



12 Port Hub

- ___ D12P-HUB
- Included with Cord and Plug drivers. Order separately for Hard Wire or 3rd Party Drivers

SPECIFICATION GUIDE: NOT TO BE USED FOR ORDERING. The Specification Guide is intended solely to ensure that all options are considered.

MODEL	COLOR	LENS	MOUNTING	CONFIGURATION	RUN LENGTH	DRIVER	CONTROLS	VOLTAGE
NDV					ft.			
NDV	27K -2700K 30K -3000K 35K -3500K 40K -4000K 60K -6000K	ST -Flat Frosted RM -Round Milky SM -Square Milky (RM and SM optional)	STD - Flat Brackets Magnets Included BK2 -15°/40° Brackets	S -Straight V -Varies*	RUN LENGTH IN FEET Fill out for every run section *DRAWINGS AND RUN LENGTH REQUIRED	CP - Cable/Plug HW - Hard Wire TD - 3rd Party Drivers Consult Factory	NDM Non-Dim IDM Inline Dim FDC 0-10V Interface FPH Forward Phase RPH Reverse Phase	100V 120V 230V 277V

NOTE: No Run to Exceed 55W without use of Side Feed Unit