

SoliTek is a European manufacturer of top quality PV cells and modules with headquarters and production plant in Vilnius, Lithuania.

The company combines the most sophisticated technologies and 20 years of experience.




WORKING CONDITIONS

Maximum system voltage	DC 1000 V (TUV)
Operating temperature	-40°C / +85°C
Maximum reverse current	15 A
Maximum wind /snow load	2400/5400 Pa
IP protection level	67
Safety class	II

TEMPERATURE COEFFICIENTS

Voltage temperature coefficient (β)	-0,34 %/°C
Current temperature coefficient (α)	+0,060 %/°C
Power temperature coefficient (δ)	-0,40 %/°C
Nominal operating module temperature (NOMT)	45±2°C


I-V CURVE

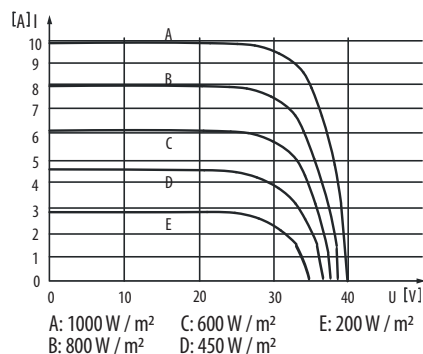

ELECTRICAL PARAMETERS

Parameter		Unit	Value		
Maximum power*	P _{max}	W	310	305	300
Maximum power point voltage	V _{mpp}	V	33,43	33,03	32,63
Maximum power current	I _{mp}	A	9,28	9,24	9,2
Open circuit voltage	V _{oc}	V	40,24	40,14	39,93
Short circuit current	I _{sc}	A	9,76	9,7	9,64
Efficiency	η	%	18,9	18,6	18,3

*Under Standard Test Conditions (STC) of irradiance of 1000W/sq. m., spectrum AM 1.5 and cell temperature of 25 °C

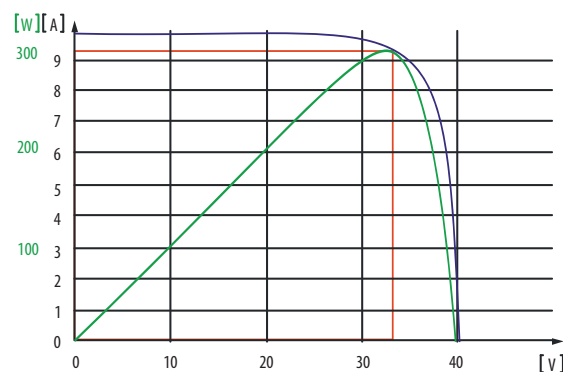

20 years




80% max output



MECHANICAL PARAMETERS

Cell size	156x156 mm
Number of cells	60 (6x10)
Front side glass	3,2 mm hardened solar glass
Weight	19 kg
Dimensions (L x W x H)	1640/1650 x 992 x 35 mm**
J-box	IP67, ventilated
Cable length	1 m
Cable cross section size	4 mm ²
Number of diodes	3
Plug-in connection	MC4
Frame	Anodised Al frame
Packing configuration	30 pcs./pallet

**Please double check with sales managers which size is delivered to You;

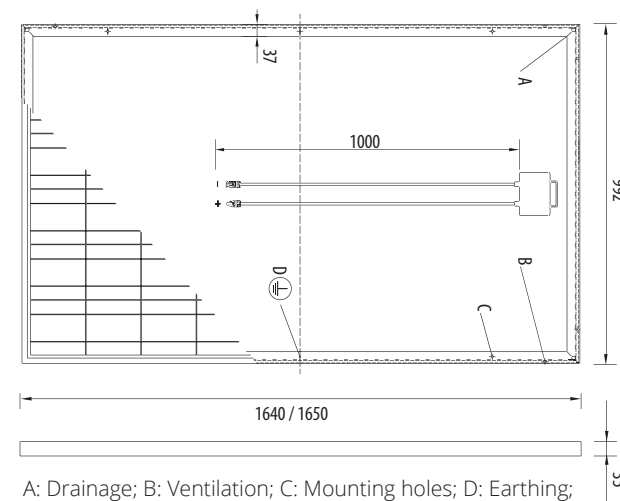

The module is manufactured by SoliTek cells, UAB.



PRODUCED USING 100% RENEWABLE ENERGY



PID free

Certificates and memberships



Tel. +370 5 263 8774

Fax: +370 5 263 8776

info@solitek.eu

www.solitek.eu

SoliTek cells Mokslininku str. 6A, Vilnius 08412, Lithuania