

FEELUX

Feelux Super Slim Linear LED





FLX Stix NDP^{ro}

Feelux Super Slim Linear LED

- Super Slim linear LED with spot free output
- Quick connection system
- Perfected with color consistency
- No dark spot at the linkage point for seamless effect
- Various mounting methods including magnetic
- Dimmable with available accessories

Dimming



Inline Dimmer



Wireless Dimmer




Specification

Feelux Item Code	Onninen Item code	SAP	Power Input	Lamp Power	Luminous Flux	Efficiency	Color Rendering	Color temperature
NDP4 40K-24V-C90	4136600	CHS783	DC24V	4W	320 lm	80lm/W	Ra>90	4000K
NDP7 40K-24V-C90	4136601	CHS784	DC24V	7W	560 lm	80lm/W	Ra>90	4000K
NDP11 40K-24V-C90	4136602	CHS785	DC24V	11W	880 lm	80lm/W	Ra>90	4000K
NDP15 40K-24V-C90	4136603	CHS786	DC24V	15W	1,200 lm	80lm/W	Ra>90	4000K



Dimension

* Fixture

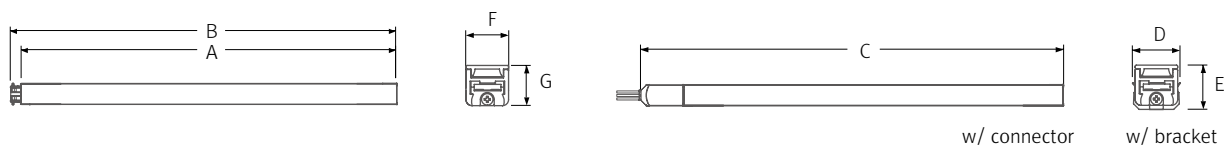

Feelux Item Code	Onninen Item code	SAP	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
NDP4 40K-24V-C90	4136600	CHS783	280	284	301	12	11	11	10
NDP7 40K-24V-C90	4136601	CHS784	559	564	581	12	11	11	10
NDP11 40K-24V-C90	4136602	CHS785	838	843	860	12	11	11	10
NDP15 40K-24V-C90	4136603	CHS786	1,117	1,122	1,139	12	11	11	10
NDPDIM	4033000	CHS782	68	72	90	12	13	11	12

Installation

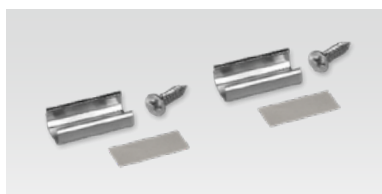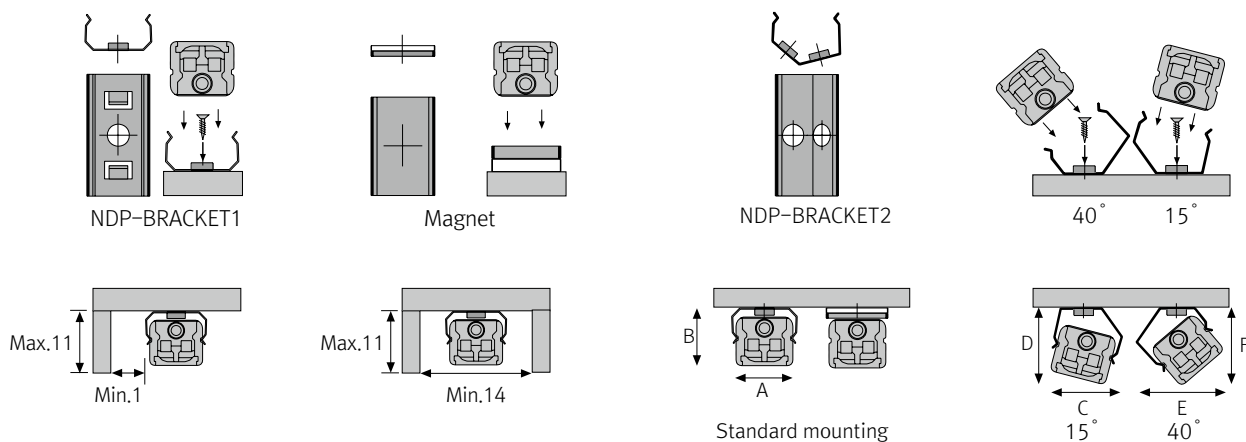

- Included : Standard brackets (NDP-BRACKET1) and metal plates with adhesive tape
- Separate purchase: Angle bracket (NDP-BRACKET2-CBF110)

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Flat type	12	11	13.1	14.3	16	14.6

Max. connection & LED Driver

– 55W in a row (single power feed)



FLC30-24V/T – CAF679 (30W)

FLC75-24V/T – CAF681 (75W)

Feelux Item Code	Onninen Item code	SAP	Max. units for LED Driver	
			24V /30W	24V /75W
NDP4 40K-24V-C90	4136600	CHS783	7	18
NDP7 40K-24V-C90	4136601	CHS784	4	10
NDP11 40K-24V-C90	4136602	CHS785	2	6
NDP15 40K-24V-C90	4136603	CHS786	2	5


Accessories & Dimming



NDPPC –CHS780

Power cable 2500mm

(Between FLX Stix NDPro & 12way distributor of LED Driver)

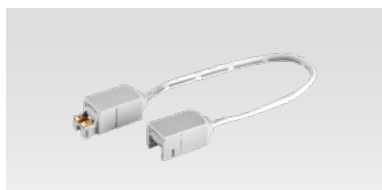

NDPPTC – CHS777/ CHS779 /CHS776 /CHS778


Connecting cables (Between FLX Stix NDPro & FLX Stix NDPro)

50mm/ 150mm /300mm /600mm



NDV-BRACKET2 (A) – CBF110

Angle bracket (15° & 40°), 1set = 2pcs



NDPDIM –CHS782

Inline Dimmer Max 55W in a row



FDC-L10 – CAF670

Dimming Interface (1-10V)

Max. 100W (100W/CH, 1CH)



Wireless control kit

(Zigbee interface & wireless Switch)

- Easy Wireless Kit – CIH752
- Easy Wireless Power Kit –CIH751

FEELUX

Feelux Super Slim LED Spotlight






FLX Spot DVS

Feelux Super Slim LED Spotlight

- Super Slim LED Spotlight
- Linkable together with FLX Stix NDV/NDPro
- Single 4W diode eliminates multiple shadows
- Virtually no heat emission and no UV radiation
- Dimmable with available accessories

Advantage of using FLX Spot DVS

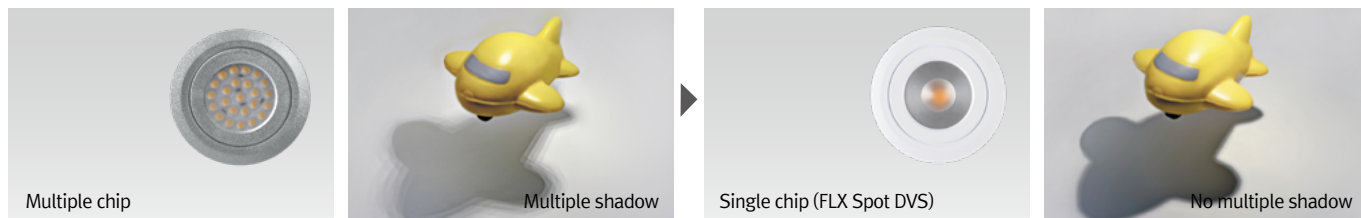


Specification


Feelux Item Code	Onninen Item code	SAP	Power Input	Lamp Power	Luminous Flux	Efficiency	Color Rendering	Kelvin
DVS4A 40K-24V-WT-60 (KIT)	4136600	CHS783	DC24V	4W	345 lm	80lm/W	Ra>80	4000K

Dimension

* Linkable

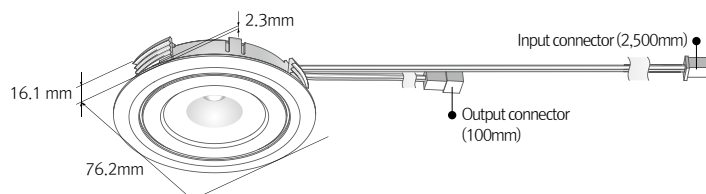

* Surface mount ring

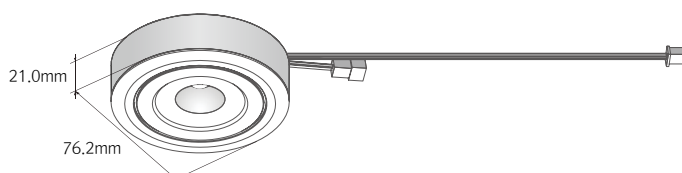

Max. connection & LED Driver

– Max 7pcs in a row (single power feed)




FLC30-24V/T – CAF679 (30W)

FLC75-24V/T – CAF681 (75W)


Feelux Item Code	Onninen Item code	SAP	Max. units for LED Driver	
			24V /30W	24V /75W
DVS4A 40K-24V-WT-60 (KIT)	4136600	CHS783	7	17

Installation


FLX Spot DVS & FLX Spot DVS




FLX Spot DVS & FLX Stix NDV / NDP



■ Recessed mounting



■ Surfaced mounting

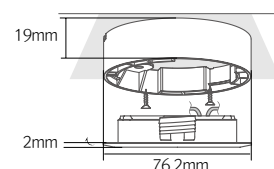

Accessories & Dimming



NDPPC –CHS780

Between FLX Spot DVS & FLX Stix NDPro



NDVPC –CAF671

Between FLX Spot DVS & FLX Stix NDV



FDC-L10 – CAF670

Dimming Interface (1-10V)
Max. 100W (100W/CH, 1CH)



Wireless control kit

(Zigbee interface & wireless Switch)

- Easy Wireless Kit – CIH752
- Easy Wireless Power Kit –CIH751




Easy Wireless Kit

Feelux Simple and easy Wireless control

- Simple plug in connection between interface and LED Lighting
- Easy wireless pairing and control
- Wireless switch can be detached from its wall plate

Connection

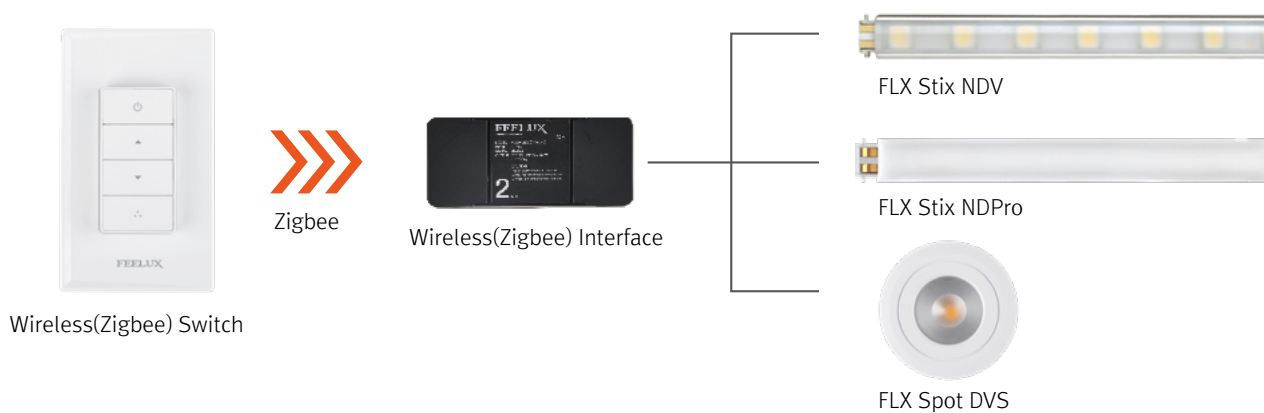

Accessories & Dimming



Easy Wireless Kit – CIH752

Included : Wireless Switch (Zigbee) –1pc
Interface (Zigbee) –1pc
1 Channel Connecting cable 300mm –1pc
Battery –1pc



Easy Wireless Power Kit –CIH751

Included : Wireless Switch (Zigbee) –1pc
Interface (Zigbee) –1pc
1 Channel Connecting cable 300mm –1pc
Battery –1pc
LED Driver (FLC75–24V/T) –1pc
Powercable 2500mm for NDPro –1pc