

## OSSP-R 75 / M75

Ex d stop end round, brass nickel-plated, M75



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



<b>Material</b>	Brass nickel-plated
<b>Material sealing gasket</b>	CR
<b>Temp. range min</b>	-60 °C
<b>Temp. range max</b>	120 °C
<b>Protection class</b>	IP66 / IP67
<b>Type of protection</b>	Ex eb, Ex db, Ex tb
<b>Ex-Certificate</b>	ATEX, IECEx
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	75
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	15 mm
<b>Key width SW</b>	10 mm
<b>External diameter ED</b>	88 mm
<b>Total length TL</b>	21 mm
<b>Surface</b>	Nickel-plated
<b>Order no. nickel-plated</b>	50065617
<b>Type</b>	OSSP-R 75 / M75
<b>Packing unit</b>	1
<b>ETIM-Classification</b>	EC000032

07.07.2020


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

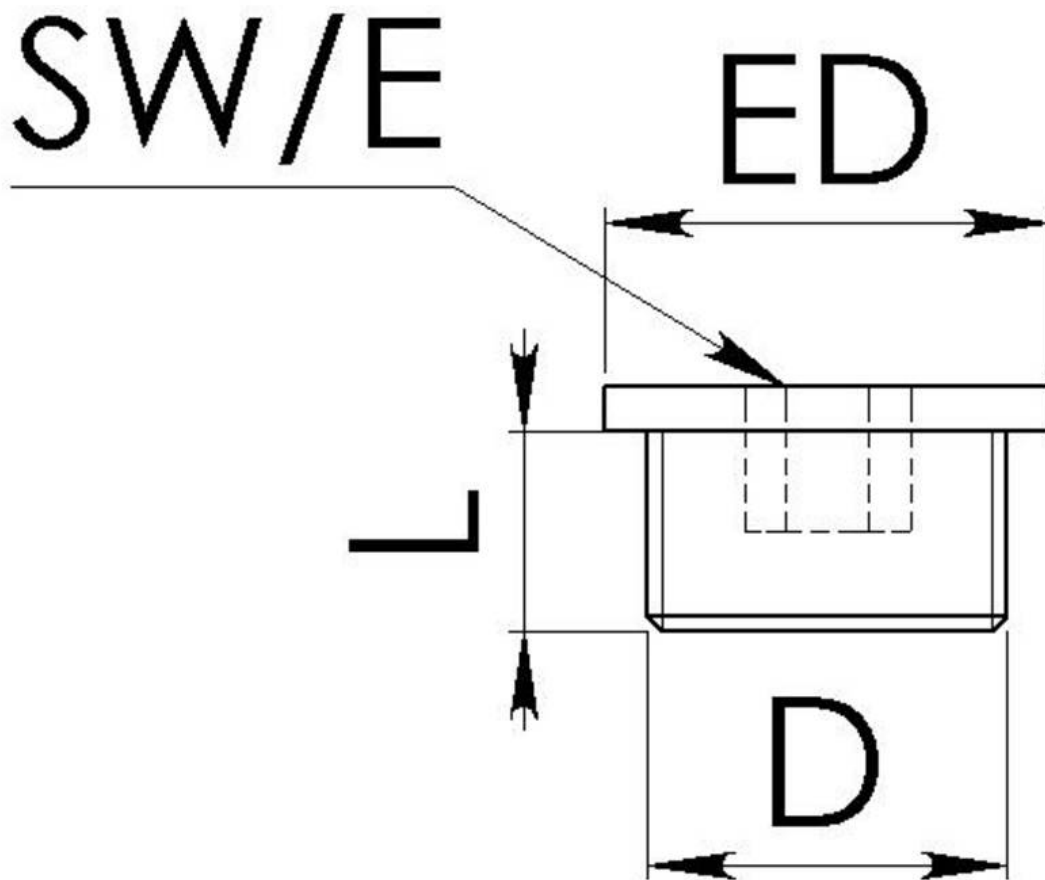

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com