

SUBMERSIBLE PRESSURE TRANSMITTER ECL

- Suitable for thick and viscous media
- Different materials for optimum media compatibility
- Lightning protection integrated
- Configurable measuring ranges



Submersible Pressure Transmitter ECL 8439

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The new Submersible Pressure Transmitter ECL is based on Trafag's own thick-film-on-ceramic technology. The optionally configurable pressure ranges can be adapted individually via interface tool and Smartphone App.



Applications

- Shipbuilding
- Process technology
- Water treatment (wastewater, grey-water, drinking water)
- Seawater




Features


- Suitable for thick and viscous media
- Different materials for optimum media compatibility
- Lightning protection integrated
- Configurable measuring ranges

Technical Data


Measuring principle	Thick-film-on-ceramic	Accuracy @ 25°C typ.	± 0.3 % FS typ. Range 0 ... 0.1 to 0 ... 0.2 bar: ± 0.5 % FS typ.
Measuring range	0 ... 0.1 to 0 ... 6.0 bar 0 ... 1.5 to 0 ... 100 psi	Media temperature	max. -25°C ... +70°C
Output signal	4 ... 20 mA	Ambient temperature	max. -25°C ... +70°C
NLH @ 25°C (BSL) typ.	± 0.2 % FS typ. Range 0 ... 0.1 to 0 ... 0.2 bar: ± 0.3 % FS typ.	Approval / conformity	DNV-GL EU RO Mutual Recognition Type Approval Certificate

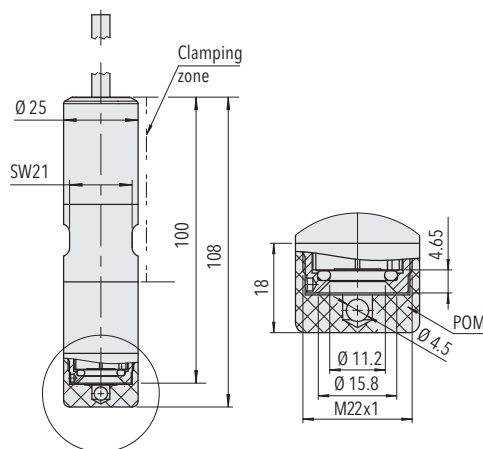

Standard version

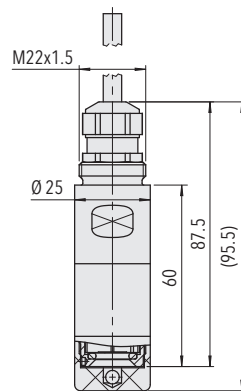

OEM-version

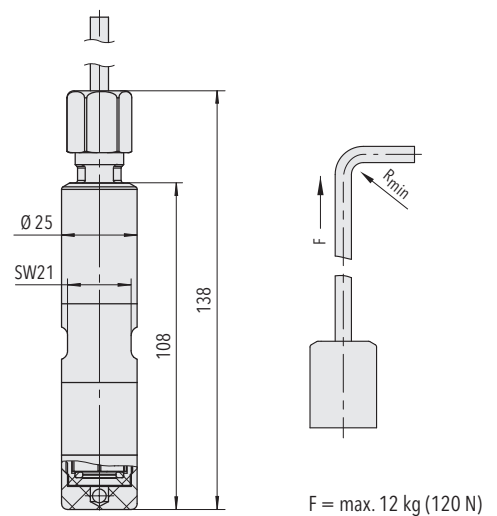

Serto adapter SO 50021-12
for stainless steel tubes with:
outer diameter 12 mm
inner diameter 8 mm



Data sheet www.trafag.com/H72336