


Careltech®

K 121 W10 OE LSZH 5.3 mm coaxial cable



Technical specifications. 5.3 mm coaxial cable K 121 W10 OE LSZH

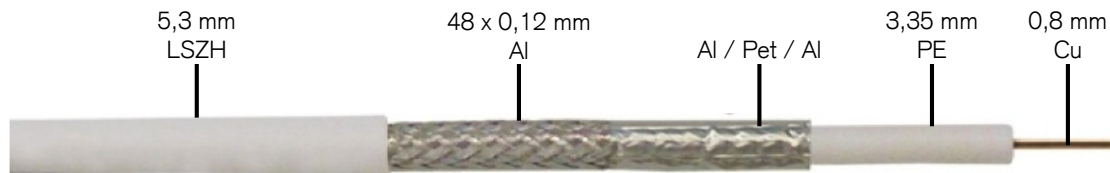

Code	OE703400
Inner conductor (mm) Ø	0.8± 0.01 Cu
Dielectric (mm) Ø	3.35 ± 0.15 PE physical foam
Foil material	Al / Pet / AL bonded
Braiding material	AL alloy wire
Number of wires (braiding)	48
Braiding composition	16 x 3 x 0.12 mm
Braiding coverage	80 %
Outer jacket (mm) Ø	5.3 LSZH (EN60331-1-2) White
Screening factor (30 - 900 MHz)	> 70 dB
Nominal attenuation (dB / 100 m)	
47 MHz	5,9
175 MHz	10,7
470 MHz	17,35
862 MHz	23,98
950 MHz	25,2
1350 MHz	30,45
1750 MHz	34,89
2150 MHz	38,98
Length	1000 m
Impedance (Ω)	75 Ω
Presentation	Wooded drum
Standards	EN 50117-2-4, EN 60331-1-2, 2011/65/UE
Reaction to fire	Eca

FIRE REACTION

