


## KRP 42/29

Reduction adaptor, polyamide, RAL 7035, Pg42 / Pg29



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

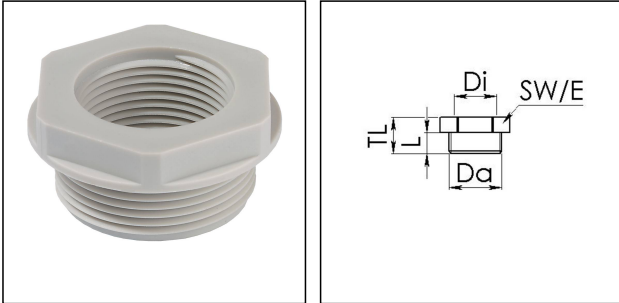

<b>Material</b>	Polyamide, fibre reinforced
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Glow wire test</b>	650 °C
<b>Thread type outer</b>	PG
<b>Ø outer thread</b>	42
<b>Length screw-in thread L</b>	14 mm
<b>Thread type inner</b>	PG
<b>Ø inner thread</b>	29
<b>Total length TL</b>	21 mm
<b>Key width SW</b>	60 mm
<b>Collar diameter (E)</b>	66 mm
<b>Form</b>	B
<b>Product Color</b>	RAL 7035
<b>Order no. RAL 7035</b>	10063623
<b>Type</b>	KRP 42/29
<b>Packing unit</b>	10
<b>ETIM-Classification</b>	EC000938

### Recommended accessories

<b>MUG 42</b>	10060678
<b>ADR 42</b>	10061427

08.02.2021

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com