

EAN: 6414150076060

www.oras.com/en/products/oras/product/1724FT



Touchless washbasin faucet with a temperature adjustment handle. The total height of the faucet enables installation even in the smallest spaces. The faucet is equipped with litter filters and non-return valves. No adjustments are needed at installation because of an advanced Autofocus sensor. Flow controller (5 l/min) guarantees low water consumption. Electrical connection with a plug transformer 230/12 V. Alternative: concealed power supply 199275. A maximum five of these items can be connected to the power supply at a time.

- Public & Semi-public
- Touchless, Plug-in transformer
- Deck mounted
- Chrome
- Fixed spout
- Temperature control handle
- Limitation option for maximum flow-rate
- Non-return valve(s), Litter filter(s)
- Autofocus sensor, Included power supply

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.08 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	85 mm
Material	brass

Software settings

Max. flow period	2 min
------------------	--------------

Electronic properties


Electrical Connection	230 / 12 V
-----------------------	-------------------



Regulations

EMC Directive	CE 2004/108/EY
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 55 / transformer IP 40


Type approvals

STF certificate	STF VTT-RTH-00024-12
KIWA SE	1462

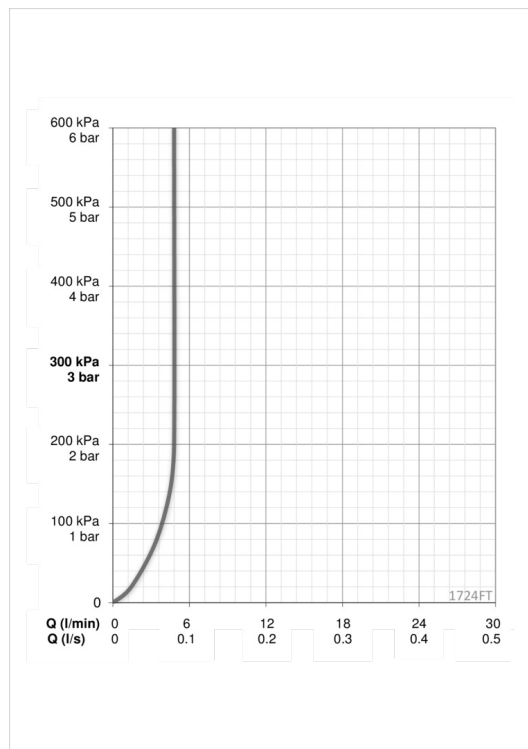

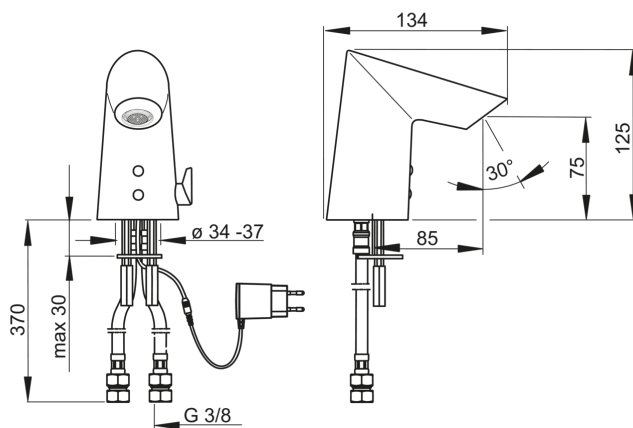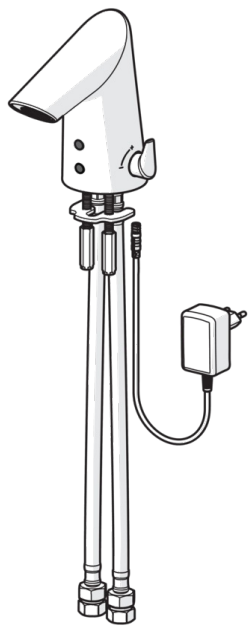

Spare parts

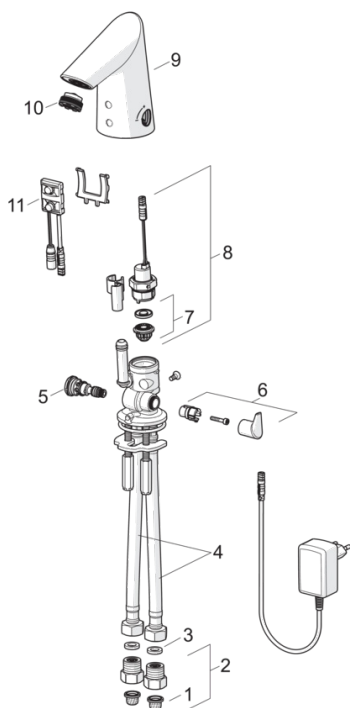

SP1724FT

	Code
01	199257/2
02	198473/2
03	600705/10
04	601481/2
05	199201V
06	601020V
07	199205V
08	199206V
09	601019V
10	601025V
11	600082V
N.I.	601061V