

Installation instructions for Merika® build-up ring

Merika no. 401



- **Size: 150 × 100**
- **Weight/kg: 0,296**
- **HVAC no: 3318110**
- For vinyl floor and tile installation
- For wooden and concrete floors
- 2 pcs ø32 side connections
- The delivery includes 3 screws

- Note! The build-up ring must be cut straight.
- The build-up ring is lubricated with a lubricant and pressed to its place.
- Note in the installation that the screws of the build-up ring (3 pcs) are screwed to their places but **not tightened**. The screws do not need to be tightened as the sealing is in the over sheath of the build-up ring/floor drain. Tightening the screws will deform the floor drain/build-up ring.
- If necessary, the side connections can be opened by hitting them open with an opening tool.

Accessories:

M-401 Build-up ring, HVAC no: 3318110

M-1991 Opening tool, HVAC-no: 3311417


Spare parts:

M-202_03 Lip seal for a floor drain, new 160

In addition to this guide, the decrees 782/2017 on Humidity control performance and 814/2020 on Water supply and sewerage equipment of properties given by the Ministry of the Environment shall be followed.

The installation work must always be made by a HVAC professional. We follow the terms of the Association of Finnish Technical Traders.

Practical screw fastening to a floor drain

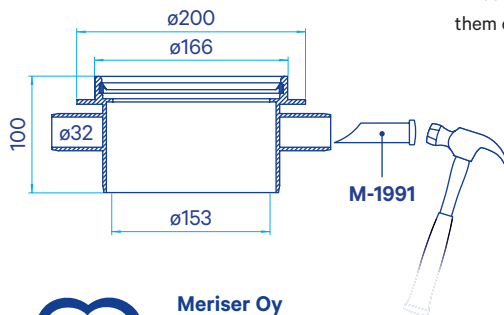

Meriser Oy
Kauppatie 2, 29900 Merikarvia
tel. +358 (0)207 189 810
www.merika.fi, merika@meriser.fi



Quality for HVAC
Technology

