


## EVSG 16

Stop end, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

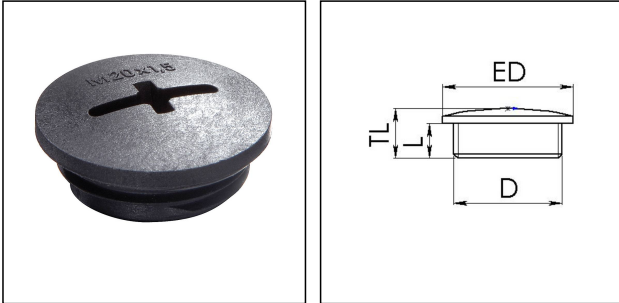

<b>Material</b>	Polyamide, fibre reinforced
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Intermittent temp. range</b>	150 °C
<b>Thread type</b>	M
<b>Protection class</b>	IP 56
<b>Connection thread size D</b>	16
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	6 mm
<b>Total length TL</b>	9 mm
<b>External diameter ED</b>	20 mm
<b>Product Color</b>	RAL 9005
<b>Order no. RAL 9005</b>	10061831
<b>Type</b>	EVSG 16
<b>Packing unit</b>	100
<b>ETIM-Classification</b>	EC000032

Recommended accessories

<b>EMUG 16</b>	10061781
<b>EADR 16</b>	10062802

06.08.2015

