


## EVSG 50

Stop end, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

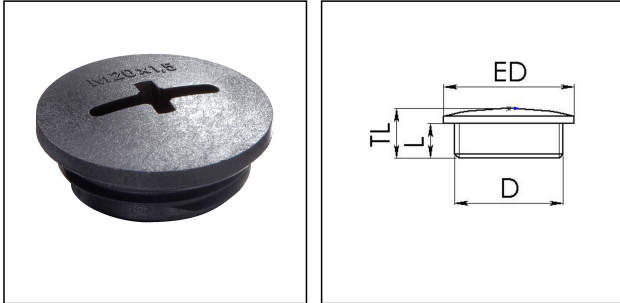

|                                 |                             |
|---------------------------------|-----------------------------|
| <b>Material</b>                 | Polyamide, fibre reinforced |
| <b>Temp. range min</b>          | -40 °C                      |
| <b>Temp. range max</b>          | 100 °C                      |
| <b>Intermittent temp. range</b> | 150 °C                      |
| <b>Thread type</b>              | M                           |
| <b>Protection class</b>         | IP 56                       |
| <b>Connection thread size D</b> | 50                          |
| <b>Lead</b>                     | 1,5                         |
| <b>Length screw-in thread L</b> | 10 mm                       |
| <b>Total length TL</b>          | 15 mm                       |
| <b>External diameter ED</b>     | 56 mm                       |
| <b>Product Color</b>            | RAL 9005                    |
| <b>Order no. RAL 9005</b>       | 10061836                    |
| <b>Type</b>                     | EVSG 50                     |
| <b>Packing unit</b>             | 50                          |
| <b>ETIM-Classification</b>      | EC000032                    |

Recommended accessories

|                |          |
|----------------|----------|
| <b>EMUG 50</b> | 10061786 |
| <b>EADR 50</b> | 10062807 |

06.08.2015

