


EVSG-ORD 25

Stop end with mounted O-Ring, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

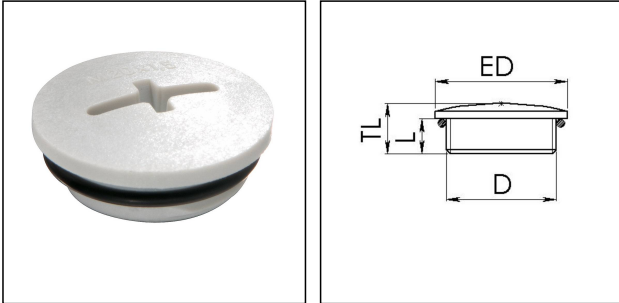

Material	Polyamide, fibre reinforced
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	150 °C
Thread type	M
Protection class	IP 68
Connection thread size D	25
Lead	1,5
Length screw-in thread L	8 mm
Total length TL	11,5 mm
External diameter ED	30 mm
Product Color	RAL 7035
Order no. RAL 7035	10064637
Type	EVSG-ORD 25
Packing unit	100
ETIM-Classification	EC000032

Recommended accessories

EMUG 25

10060773

06.08.2015

