


NSKV 3/4

Cable gland, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

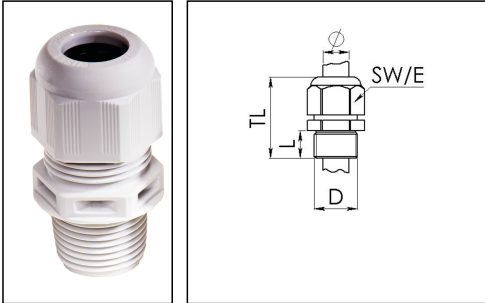

Material cable gland	Polyamide
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Protection class	IP 69K, IP 68, 5 bar 30 min
Thread type	NPT
Connection thread size D	3/4"
Length screw-in thread L	15 mm
Cable diameter min	9 mm
Cable diameter max	17 mm
Cable Diameter UL	10,8 mm - 15,8 mm
Key width SW	29 mm
Collar diameter (E)	32 mm
Total length TL	44 mm - 53 mm
Glow wire test	750 °C
Install. torques cap nut	4 N m
Type of cable anchorage	A
Install. torques fitting	10 N m
Impact category	4
Product Color	RAL 7035
Order no. RAL 7035	10062658
Type	NSKV 3/4
Packing unit	50
ETIM-Classification	EC000441

Recommended accessories

RDE 25	10060768
BS 12	10064009

06.08.2015

