


NSKV 1 1/4

Cable gland, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

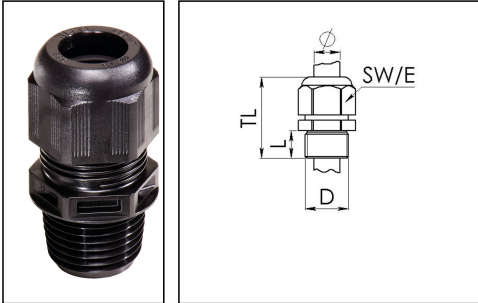

Material cable gland	Polyamide
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Protection class	IP 69K, IP 68, 5 bar 30 min
Thread type	NPT
Connection thread size D	1 1/4"
Length screw-in thread L	18 mm
Cable diameter min	16 mm
Cable diameter max	28 mm
Cable Diameter UL	17,4 mm - 26,4 mm
Key width SW	46 mm
Collar diameter (E)	51 mm
Total length TL	60 mm - 73 mm
Glow wire test	750 °C
Install. torques cap nut	20 N m
Type of cable anchorage	A
Install. torques fitting	20 N m
Impact category	4
Product Color	RAL 9005
Order no. RAL 9005	10061492
Type	NSKV 1 1/4
Packing unit	10
ETIM-Classification	EC000441

Recommended accessories

RDE 40	10062187
BS 20	10064013

06.08.2015

