


## ESKV 32 LT

Cable gland LowTemp, polyamide with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

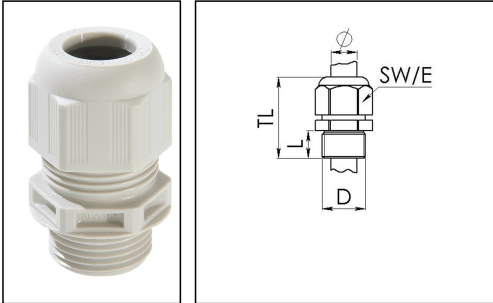

Material cable gland	Polyamide
Material sealing gasket	Silicone
Protection class	IP 69K, IP 68, 5 bar 30 min
Temp. range min	-60 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Glow wire test	750 °C
Thread type	M
Connection thread size D	32
Lead	1,5
Length screw-in thread L	12 mm
Cable diameter min	13 mm
Cable diameter max	21 mm
Key width SW	36 mm
Collar diameter (E)	40 mm
Total length TL	42 mm - 51 mm
Type of cable anchorage	A
Install. torques fitting	15 N m
Impact category	4
Install. torques cap nut	4 N m
Product Color	RAL 7035
Type	ESKV 32 LT
Order no. RAL 7035	10062780
Packing unit	25
ETIM-Classification	EC000441

Recommended accessories

<b>RDE 32 LT</b>	10063934
<b>ORD-S 32</b>	10101761

06.08.2015

