



MULTISPLIT

INDOOR UNIT TECHNICAL DATA

HIGH - WALL



Wired controller (optional)

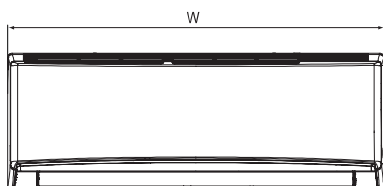

CAPACITY	H (MM)	W (MM)	D (MM)
9K	275	790	200
12K	289	845	209
18K	300	970	224
24K	325	1078	246

HIGH-WALL INDOOR UNITS

		X3I ECO PLUS 27 HL WF		X3I ECO PLUS 35 HL WF		X3I ECO PLUS 52 HL WF		X3I ECO PLUS 70 HL WF	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2,7	2,8	3,5	3,67	5,2	5,3	7,0	7,4
Air flowrate	m³/h	560-490-460-430-380-330-290		680-620-560-490-450-420-390		800-720-650-610-570-520-470		1250-1100-1000-950-900-850-750	
Dehumidification	l/h	0,8		1,4		1,8		2,4	
Fan speeds	n°	7		7		7		7	
Sound pressure (sh.-h.-m.-l.)	dB(A)	41-37-35-32-29-26-24		42-38-36-34-32-29-26		45-43-41-38-35-34-31		48-45-42-39-37-36-33	
Sound power U.I. (sh.-h.-m.-l.)	dB(A)	55-48-46-44-40-37-35		57-50-48-46-44-41-38		59-57-55-52-49-48-45		63-60-57-54-52-51-48	
Liquid pipe diameter	mm(inch")	6,35(1/4")		6,35(1/4")		6,35(1/4")		6,35(1/4")	
Gas pipe diameter	mm(inch")	9,52(3/8")		9,52(3/8")		12,7(1/2")		15,88 (1/2")	
Net dimension (H./W./D.)	mm	275/790/200		289/845/209		300/970/224		325/1078/246	
Net weight	kg	9		10,5		13,5		16,5	