

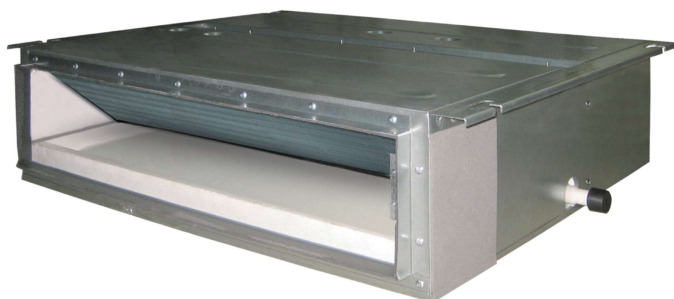


DUCTED

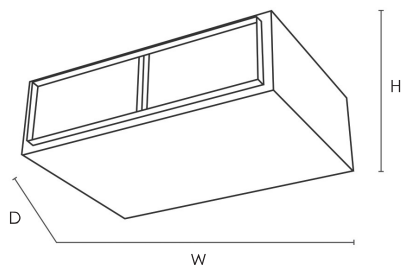

Wired controller (optional)

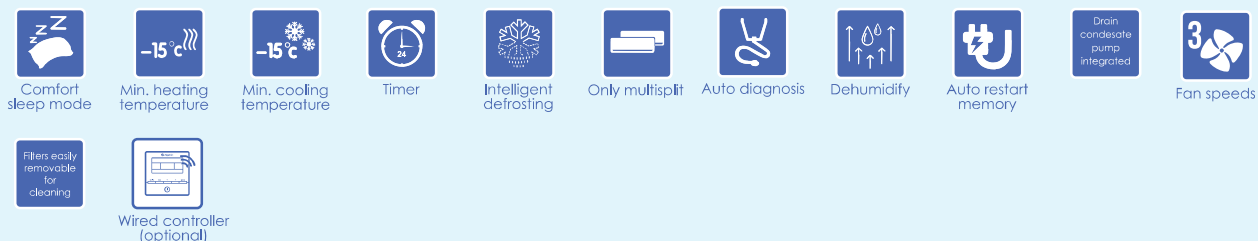

CAPACITY	H (MM)	W (MM)	D (MM)
9K	200	700	615
12K	200	700	615
18K	200	900	615

SLIM DUCTED INDOOR UNITS

	Units	X3I ECO SD25HL		X3I ECO SD35HL		X3I ECO SD50HL	
		Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2,50	2,80	3,5	3,85	5,0	5,5
Air flowrate	m³/h	450-280-250		550-400-300		700-600-500	
Min-max Static pressure	Pa	0-10		0-10		0-10	
Dehumidification	l/h	0,8		1,4		1,8	
Fan speeds	n°	3+auto		3+auto		3+auto	
Sound pressure (h.-m.-l.)	dB(A)	37-34-31		39-35-32		41-36-33	
Sound power (h.-m.-l.)	dB(A)	47-44-41		49-45-42		50-46-43	
Liquid pipe diameter	mm(inch")	6,35(1/4")		6,35(1/4")		6,35(1/4")	
Gas pipe diameter	mm(inch")	9,52(3/8")		9,52(3/8")		12,7 (1/2")	
Net dimension (H./W./D.)	mm	200/700/615		200/700/615		200/900/615	
Net weight	kg	22		23		27	