



FLOOR CEILING

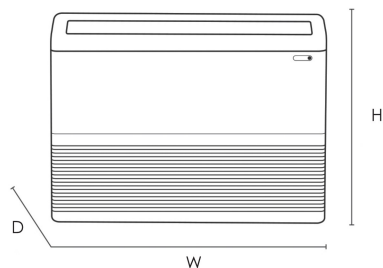

Wired
controller
(optional)

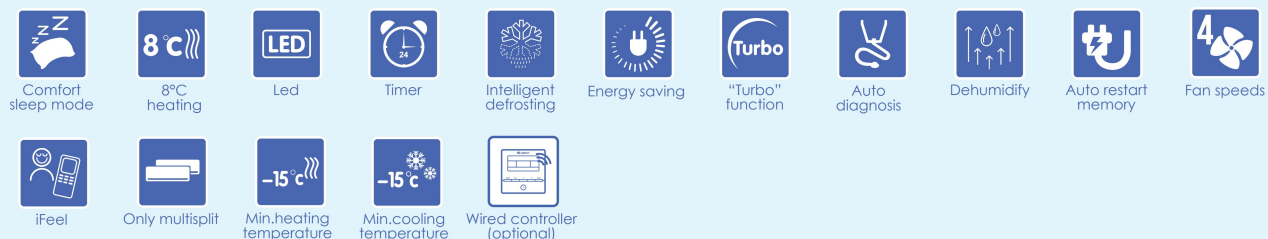

CAPACITY	H (MM)	W (MM)	D (MM)
9K-12K-18K	665	870	235

FLOOR CEILING INDOOR UNITS		X3I ECO FC26HL		X3I ECO FC35HL		X3I ECO FC45HL	
	Units	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	2,6	2,7	3,5	4,0	4,5	5,5
Air flowrate	m ³ /h	700-610-540-420		700-610-540-420		700-610-540-420	
Dehumidification	l/h	0,8		1,4		1,8	
Fan speeds	n°	7		7		7	
Sound pressure (sh.-h.-m.-l.)	dB(A)	38-35-30-26		38-35-30-26		38-35-30-26	
Sound power U.I. (sh.-h.-m.-l.)	dB(A)	52-49-44-40		52-49-44-40		52-49-44-40	
Liquid pipe diameter	mm(inch")	6,35(1/4")		6,35(1/4")		6,35(1/4")	
Gas pipe diameter	mm(inch")	9,52(3/8")		9,52(3/8")		12,7 (1/2")	
Net dimension (H./W./D.)	mm	665/870/235		665/870/235		665/870/235	
Net weight	kg	25		25		25,5	