

# 1RU 24-Port Colored Insert Snap-in-Jack Patch Panel

Datasheet: GD069643v10




## APPLICATION

The 1RU Snap-in-Jack patch panel accommodates 24-ports, providing colored inserts with dust protection for individual port identification. The panel is supplied with a detachable cable manager. Black inserts with clear dust covers are pre-loaded into the panel as standard. Optional color inserts are available for purchase separately, for added ease of port identification.

## FEATURES

- Mounts to standard 19-inch racks and cabinets
- Interchangeable, easy to fit color inserts for port/service ID
- Individual port covers for dust protection
- Full port labeling
- Rack position identification space available
- Detachable cable manager
- Durable powder coat finish in black or gray
- Suitable for both shielded and unshielded jacks (jacks must be installed and removed from back of panel)
- Supplied with rack mounting kit

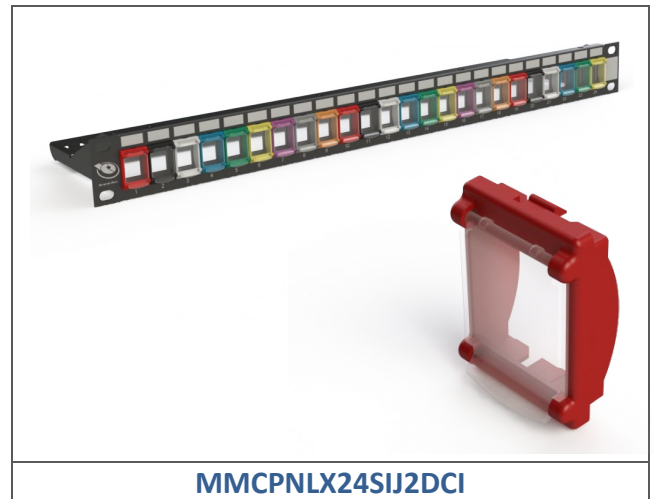

## ORDER INFO


Part Number	Item Description	Color	Weight per Item (nom)	Qty per Pack
MMCPNLX24SIJ2DCI	1RU 24-Port Colored Insert Snap-in-Jack Panel	Black	670g	1
MMCPNLX24SIJ8DCI	1RU 24-Port Colored Insert Snap-in-Jack Panel	Gray	670g	1
MMCACCINSDC1	Insert with Dust Cover, Red	Red	2g	80
MMCACCINSDC2	Insert with Dust Cover, Black	Black	2g	80
MMCACCINSDC3	Insert with Dust Cover, White	White	2g	80
MMCACCINSDC4	Insert with Dust Cover, Blue	Blue	2g	80
MMCACCINSDC5	Insert with Dust Cover, Green	Green	2g	80
MMCACCINSDC6	Insert with Dust Cover, Yellow	Yellow	2g	80
MMCACCINSDC7	Insert with Dust Cover, Purple	Purple	2g	80
MMCACCINSDC8	Insert with Dust Cover, Gray	Gray	2g	80
MMCACCINSDC9	Insert with Dust Cover, Orange	Orange	2g	80
MMCIRT001	Retraction Tool	Red	2g	1

# 1RU 24-Port Colored Insert Snap-in-Jack Patch Panel

Datasheet: GD069643v10



## PHYSICAL CHARACTERISTICS

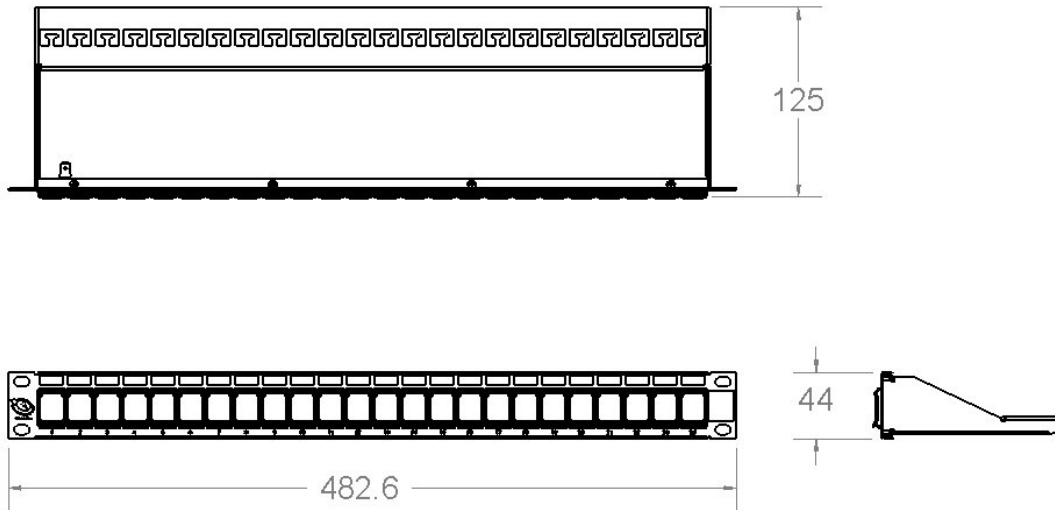

## MATERIALS

- Powder coated plain carbon steel
- Clear PC dust covers
- ABS color inserts

## ENVIRONMENTAL CONDITIONS

- Operating temperature from -10°C to 60°C at 93% relative humidity, non-condensing
- Storage temperature from -40°C to 70°C

*“Leviton is dedicated to designing, developing, and manufacturing sustainable high performance structured cabling and specialty cabling solutions.”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.