


Liukukannake, korkea, PSK 7324, DN 200 – 500

Valmistettu PSK 7324 -standardin mukaan.
Liukukannakkeen materiaali on S235JR SFS-EN 10025-2, 16Mo3 tai 13CrMo4-5 SFS-EN 10028-2 tai 1.4404 SFS-EN 10028-7.

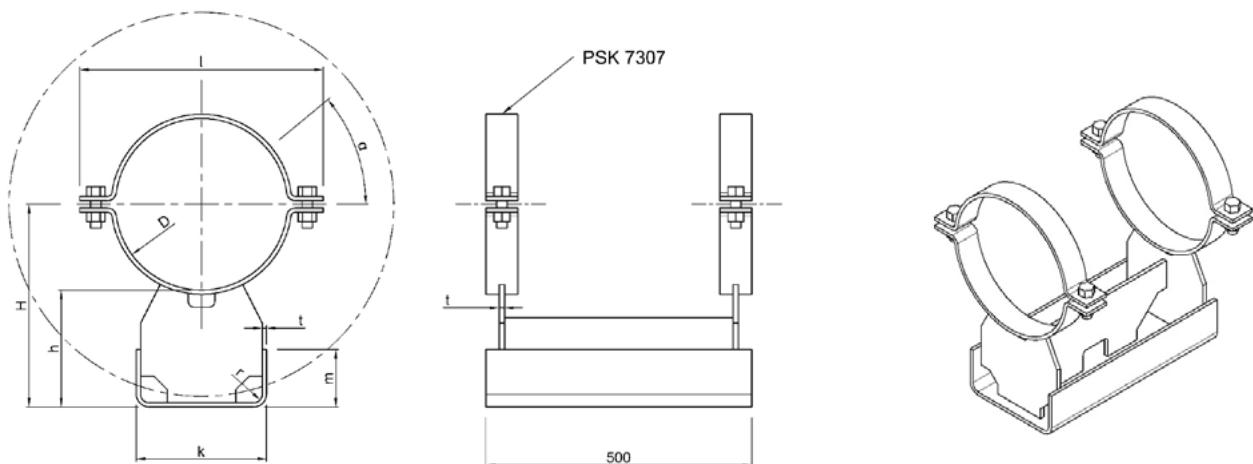

| Putki | | Kannake, mitat mm | | | | | | | | Massa kg | Eriste max. mm |
|-------|--------------------|-------------------|-----|-----|-----|-----|-----|----|----|----------|----------------|
| DN | de ₂ mm | D | l | H | h | k | m | t | r | | |
| 200 | 219.1 | 219.1 | 327 | 280 | 170 | 155 | 81 | 6 | 12 | 17 | 160 |
| 250 | 273 | 273 | 408 | 307 | 170 | 180 | 83 | 8 | 16 | 24 | |
| 300 | 323.9 | 323.9 | 458 | 382 | 220 | 245 | 108 | 8 | 16 | 33 | |
| 350 | 355.6 | 355.6 | 492 | 398 | 220 | 260 | 110 | 10 | 20 | 40 | 200 |
| 400 | 406.4 | 406.4 | 570 | 424 | 220 | 270 | 110 | 10 | 20 | 48 | |
| 450 | 457 | 457 | 620 | 449 | 220 | 285 | 110 | 10 | 20 | 51 | |
| 500 | 508 | 508 | 672 | 474 | 220 | 325 | 112 | 12 | 24 | 61 | |

Osat hitsataan toisiinsa jatkuvalla molemminpuolisella pienahitsillä. Hitsin a-mitta on vähintään 0,35 x ohuemman levyn paksuus. Putkisangat voidaan tarvittaessa kiinnittää liukujalkaan vaakatasoon nähden kulmaan a. Suositeltava kulma a = 0° tai 45°.

| DN | a | b | c | d | e | f | g | i | j | n | o | p | t |
|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|
| 200 | 444 | 135 | 184 | 143 | 165 | 118 | 274 | 26 | - | - | 105 | - | 6 |
| 250 | 432 | 135 | 178 | 164 | 166 | 145 | 299 | 26 | - | - | 105 | - | 8 |
| 300 | 432 | 160 | 178 | 229 | 220 | 170 | 374 | 42 | 90 | 206 | 130 | 50 | 8 |
| 350 | 430 | 160 | 178 | 240 | 219 | 186 | 388 | 42 | 95 | 204 | 130 | 50 | 10 |
| 400 | 420 | 160 | 172 | 250 | 221 | 214 | 414 | 34 | 100 | 202 | 150 | 50 | 10 |
| 450 | 420 | 160 | 172 | 265 | 221 | 239 | 439 | 33 | 108 | 201 | 150 | 50 | 10 |
| 500 | 418 | 160 | 172 | 300 | 224 | 264 | 462 | 36 | 113 | 201 | 150 | 75 | 12 |

