


# Eaton C10G20

Catalog Number: C10G20

Eaton Bussmann series low voltage 10 x 38 mm cylindrical/ferrule fuse, rated at 500 Volts AC, 20 Amps, 120 kA Breaking capacity, class gG/gL, without indicator, compatible with a CHM Modular fuse holder

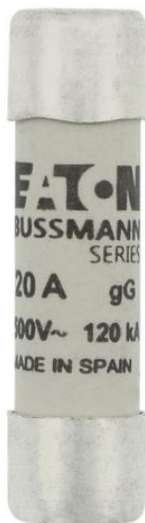

## General specifications

<b>Product Name</b>	<b>Catalog Number</b>
Eaton Bussmann series low voltage cylindrical fuse	C10G20
	<b>EAN</b>
	5027590493475
<b>UPC</b>	<b>Product Length/Depth</b>
051712754293	38 mm
<b>Product Height</b>	<b>Product Width</b>
10 mm	10 mm
<b>Product Weight</b>	<b>Compliances</b>
8.2 g	CE Marked
	GoST-R
	RoHS Compliant
<b>Certifications</b>	
IEC 60269	

**Type**

fuse

**Application**

for industrial applications  
for general purpose use

**Amperage Rating**

20 A

**Fuse size**

10 x 38 mm

**Current type**

AC

**Breaking capacity**

120 kA

**Frequency rating - max**

62 Hz

**Frequency rating - min**

45 Hz

**Rated voltage AC**

500 V

**Class**

Class C gL/gG

**Fuse type**

C10G

**Utilization category**

gG (cable protection/equipment protection)

**Fuse indicator**

Other

**Watt losses**

2 W

**Connection**

Ferrule end x ferrule end

**Construction size**

10 mm x 38 mm

**Fuse shape**

Cylindrical

Voltage type

AC

Suitable for

CHM Modular fuse holder

Material

Ceramic

Release characteristic

Other

Quantity

10

Voltage rating

500 V



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2024 Eaton. Kaikki  
oikeudet pidätetään.

Eaton is a registered trademark.

All other trademarks are  
property of their respective  
owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)