


## EX-KRM 16/12

Ex-reduction adaptor, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

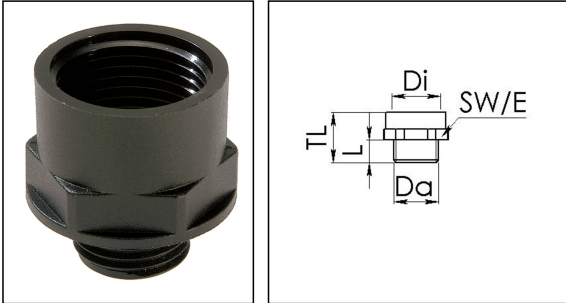

Material	Polyamide, fibre reinforced
Temp. range min	-20 °C
Temp. range max	70 °C
Protection class	IP 66
Marking	II2G ExeII II2D ExtD A21 IP66
Approval	PTB 04 ATEX 1040 X
Thread type outer	M
Ø outer thread	16
Lead outer	1,5
Length screw-in thread L	9 mm
Thread type inner	M
Connection thread size, inner	12
Lead inner	1,5
Length internal thread	15,5 mm
Key width SW	20 mm
Collar diameter (E)	23 mm
Total length TL	27 mm
Form	A
Product Color	RAL 9005
Order no. RAL 9005	10064720
Type	EX-KRM 16/12
Packing unit	100
ETIM-Classification	EC000938

Recommended accessories

**EMUG 16**

10061781

07.01.2015