


ESKV-L 50

Cable gland, polyamide with long thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

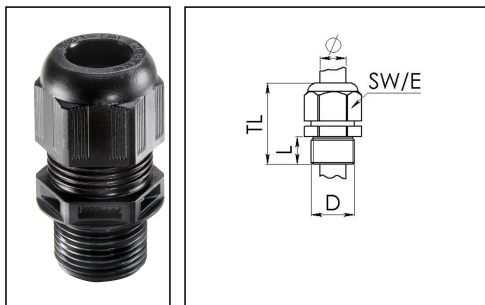

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 69K, IP 68, 5 bar 30 min
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Glow wire test	750 °C
Thread type	M
Ø Connection thread D	50
Lead	1,5
Length screw-in thread L	18 mm
Ø cable diameter min	21 mm
Ø cable diameter max	35 mm
Ø cable diameter UL	24,3 mm - 33,4 mm
Key width SW	55 mm
Collar diameter (E)	61 mm
Total length TL	63 mm - 76 mm
Type of cable anchorage	A
Install. torques fitting	30 N m
Impact category	5
Install. torques cap nut	30 N m
Advice	VDE - Approval: -20°C - 100°C
Equipment	Incl. connection thread gasket
Type	ESKV-L 50
Product Color	RAL 9005

Order no. RAL 9005

10066506

Packing unit

10

ETIM-Classification

EC000441

Recommended accessories

EMUG 50

10061786

RDE 50

10062188

MFD 50/25/050

10063102

BS 25

10064015

MFD 50/09/080

10064394

14.12.2015

