


ESKV-L 16

Cable gland, polyamide with long thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

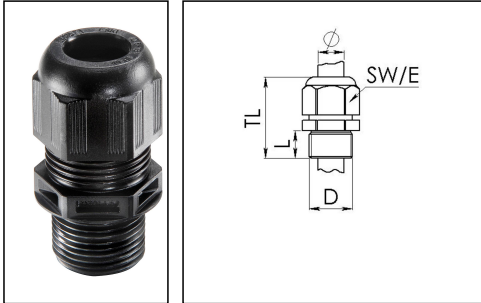

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 69K, IP 68, 5 bar 30 min
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Glow wire test	750 °C
Thread type	M
Ø Connection thread D	16
Lead	1,5
Length screw-in thread L	15 mm
Ø cable diameter min	4,5 mm
Ø cable diameter max	10 mm
Ø cable diameter UL	6 mm - 8,6 mm
Key width SW	20 mm
Collar diameter (E)	22 mm
Total length TL	37 mm - 43 mm
Type of cable anchorage	A
Install. torques fitting	3,5 N m
Impact category	2
Install. torques cap nut	1,5 N m
Advice	VDE - Approval: -20°C - 100°C
Type	ESKV-L 16
Product Color	RAL 9005
Order no. RAL 9005	10066501

Packing unit

50

ETIM-Classification

EC000441

Recommended accessories

EMUG 16	10061781
RDE 16	10062184
EADR 16	10062802
BS 6	10064004
MFD 16/02/040	10064393
MFD 16/03/021	10101014

14.12.2015

