


ESKV-L 32

Cable gland, polyamide with long thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

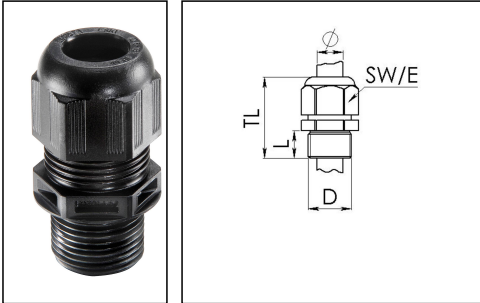

Material cable gland	Polyamide
Material sealing gasket	EPDM
Protection class	IP 69K, IP 68, 5 bar 30 min
Temp. range min	-40 °C
Temp. range max	100 °C
Intermittent temp. range	120 °C
Glow wire test	750 °C
Thread type	M
Ø Connection thread D	32
Lead	1,5
Length screw-in thread L	15 mm
Ø cable diameter min	13 mm
Ø cable diameter max	21 mm
Ø cable diameter UL	14,6 mm - 19,5 mm
Key width SW	36 mm
Collar diameter (E)	40 mm
Total length TL	45 mm - 54 mm
Type of cable anchorage	A
Install. torques fitting	15 N m
Impact category	4
Install. torques cap nut	4 N m
Advice	VDE - Approval: -20°C - 100°C
Type	ESKV-L 32
Product Color	RAL 9005
Order no. RAL 9005	10066504

Packing unit

25

ETIM-Classification

EC000441

Recommended accessories

EMUG 32	10061784
RDE 32	10062186
EADR 32	10062805
BS 14	10064011
MFD 32/04/070	10064344
MFD 32/06/060	10064345
MFD 32/04/080	10064950
MFD 32/03/080	10101018
MFD 32/05/070	10101140
MFD 32/01/115-01/085	10101256
MFD 32/03/065	10102169
MFD 32/03/090	10102170

14.12.2015

