



INDICATIVE PHOTO

## General features : RS3290

RS range unit coolers have been designed to be installed inside cold rooms suited for fresh and frozen goods storage.

Their shape, being extremely compact, make their installation possible also in cold rooms having very small dimensions

RS range unit coolers are available in two main versions: the one suited for high temperature (differentiated fin spacing 3,5/7mm); the other version suited for medium and low temperature application (differentiated fin spacing 4,5/9mm).

In models for high temperature the version with the fitted defrosting heater is not available; for these models the heaters are optional items and they will be supplied not mounted.

The models for medium and low temperature application are available in the version supplied without defrosting heater (mod. RS...B) and with defrosting heater mounted and wired on the unit cooler's terminal box as well (mod. RS...BED).

The coil is made of aluminium fins and 3/8" copper tube with geometry 25x22  
It is tested with nitrogen at a pressure of 25 bar

The fan motor models in use have the following features:

Manufactured following EN 60335-1 laws, with internal thermal protection

Draw through air flow

Fan guard made of plastic and brackets made of steel

Fan diameter 200mm, 34° inclination

Power supply 220-240V/1/50-60Hz

IP42 protection rate

Operating temperature from -40°C to +40°C

B insulation class

It is tested with nitrogen at a pressure of 25 bar

The housing is made of aluminium

The manufacturing solutions used give the housing strength and guarantee the absence of vibrations during the functioning.

Screws, washers and nuts are made of stainless steel

The B and BED models are supplied with fitted drip tray



INDICATIVE PHOTO


## Product file : Unit coolers

Code	RS3290
Model	Ceiling
Range	RS
Application	MBP
Net weight	11,5 kg
Inlet connection	12 mm-1/2" SAE
Outlet connection	16 mm
Drain connection	1/2" Gas (20mm)
Ped	0
Rows	4
Fin spacing	3,5/7
Circuit volume	1,73 dm <sup>3</sup>
Total surface	7,16 m <sup>2</sup>

## Fan motor

Fans no.	3
Diameter	200 mm
Power supply	220-240/1/50-60
Speed	1300 rpm
Power consumption	129 W
Current consumption	0,75 A
Air flow	595 m <sup>3</sup> /h
Air throw	2,5 m

## Technical drawing - RS3290

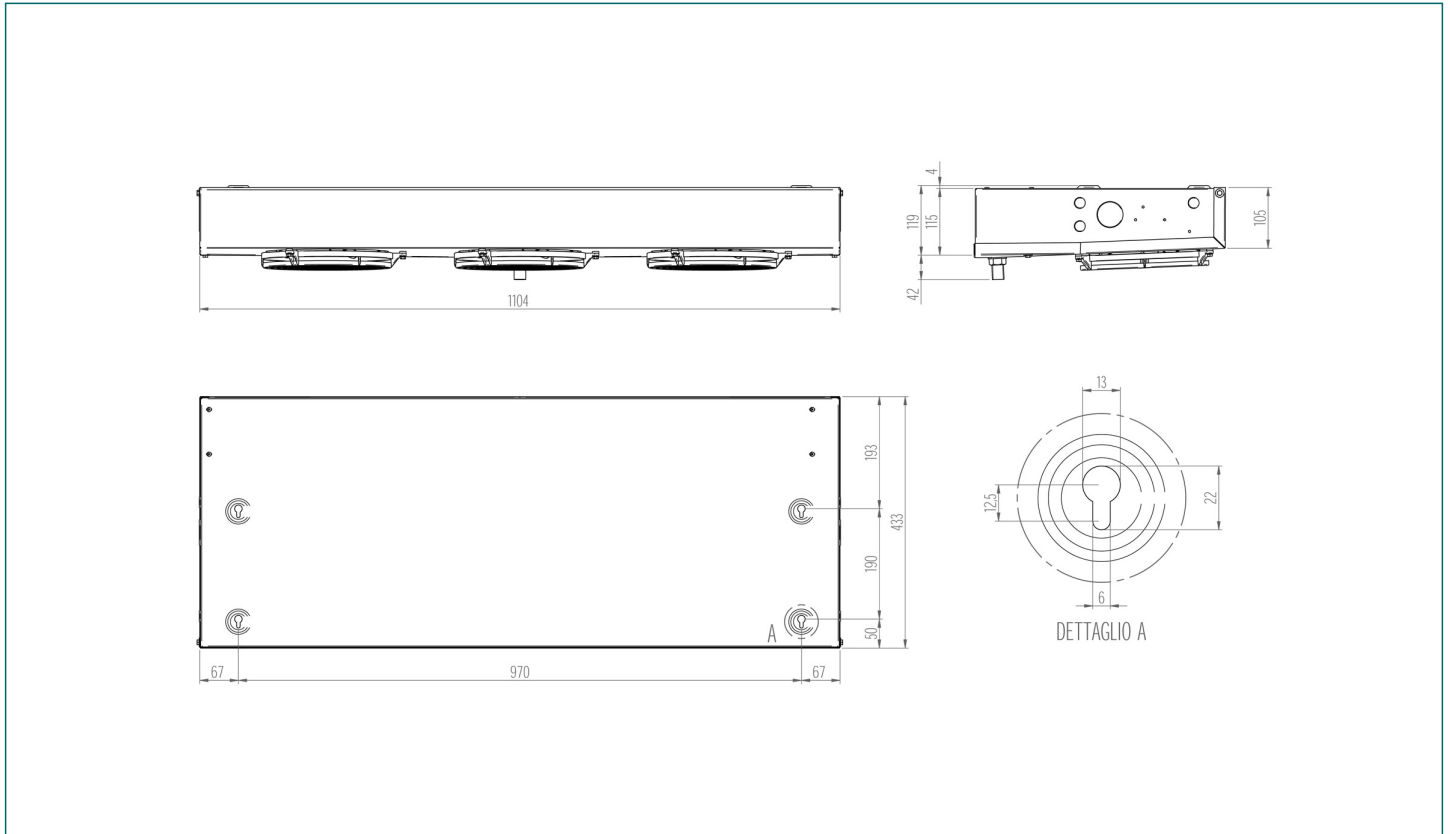

## Refrigerating capacity table (watt) - Gas : R404A

dT \ Tc	-5°C	0°C	2°C	4°C	6°C	8°C	10°C	12°C	15°C
10	1750	1880	1910	1940	1960	1990	2030	2090	2180
9	1570	1690	1710	1740	1760	1780	1840	1880	1940
8	1390	1490	1510	1520	1540	1570	1620	1660	1720
7	1200	1280	1300	1310	1330	1360	1390	1430	1490
6	989	1060	1070	1080	1090	1130	1160	1200	1260
5	780	842	854	867	880	906	932	959	999