


## EVPS 12

Pressure compensation unit, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

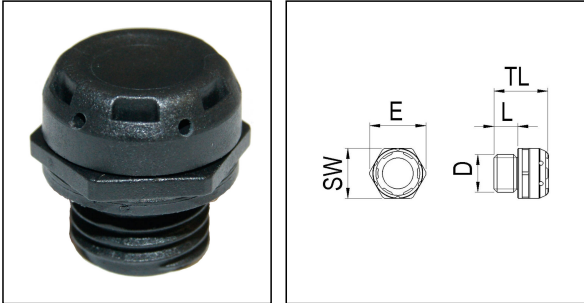

<b>Material cable gland</b>	Polyamide
<b>Material membrane</b>	ePTFE
<b>Material sealing gasket</b>	TPE
<b>Airflow at 70mbar</b>	22 l/h
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Protection class</b>	IP 68
<b>Glow wire test</b>	650 °C
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	12
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	10 mm
<b>Key width SW</b>	16 mm
<b>Collar diameter (E)</b>	18 mm
<b>Total length TL</b>	17,4 mm
<b>Product Color</b>	RAL 9005
<b>Order no. RAL 9005</b>	10102370
<b>Type</b>	EVPS 12
<b>Packing unit</b>	10
<b>ETIM-Classification</b>	EC000441

Remarks:

Vent PLUG pressure compensation unit

Airflow at 70mbar

26.01.2016

WISKA Hoppmann & Mulsow GmbH  
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany  
☎ +49-4191-508-0 · 📠 +49-4191-508-209  
contact@wiska.com · www.wiska.com

Other technical data on request / subject to change without notice

