





YORK®

CROSS SECTION AND MATERIALS

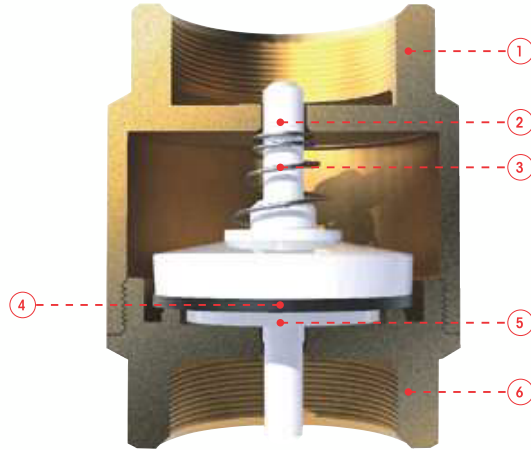

POS	DESCRIPTION	N.	MATERIAL
1	Body	1	CW617N brass
2	Pin	1	Polymer
3	Spring	1	Stainless steel AISI302
4	Washer	1	NBR
5	Plate	1	Polymer
6	End adapter	1	CW617N brass

DIAGRAM OF THE MINIMUM PRESSURE NEEDED TO GET THE VALVES OPENING

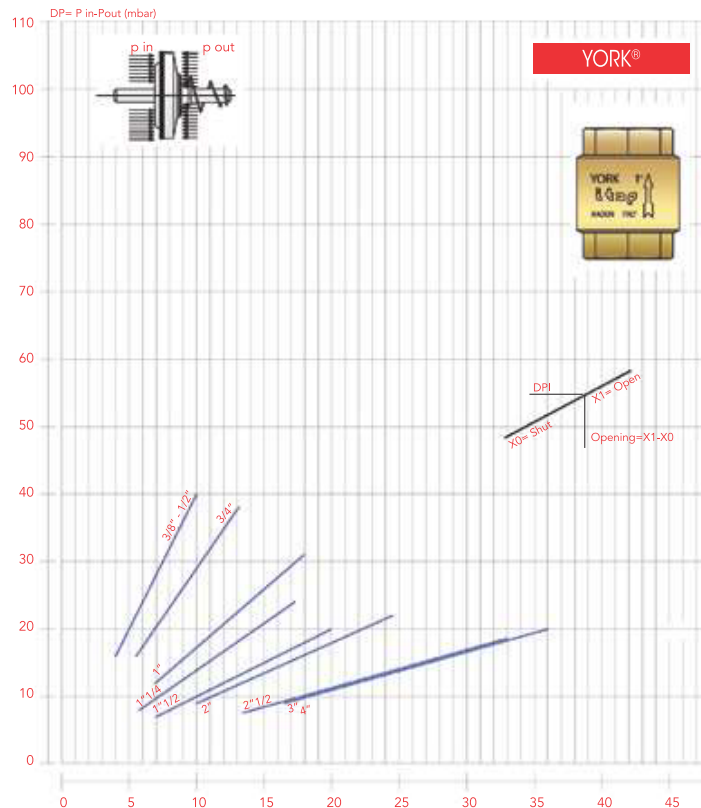

The opening of the valve is given by the different pressure between the two sides of the seat.

Losses of pressure available on www.itap.it.

