

EAN: 6414150069970

www.oras.com/en/products/oras/product/2711F



Single lever washbasin faucet with an Easy-Grip lever, thermostatic control unit and Smart press pad. The Easy-Grip lever is pleasant to touch and adjusts both the water flow and temperature. Thermostatic control unit maintains the requested water temperature when using the Smart press pad. The faucet is equipped with flexible pipes. The function of Smart press pad: pressing the press pad starts the water flow from the faucet. The faucet closes automatically after 6 seconds or by re-pressing the pad. Smart press pad can be placed freely close to the faucet, e.g. on the wall or on the side of the washbasin.

- Bathroom
- Battery-operated
- Deck mounted
- Chrome
- Fixed spout
- utility shut-off valve with remote control
- Easy-Grip Lever
- Thermostatic cartridge that reacts quickly and precisely to changes in water temperature
- surfaces in contact with drinking water contain less than 0.3% lead

Technical data

Flow properties

Flow-rate at 300 kPa	0.12 l/s
Pressure loss with flow (0.1 l/s)	200 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G1/2 / G3/8
Projection	98 mm
Material	brass

Software settings

Max. flow period	6 s (4 - 15s)
------------------	----------------------

Electronic properties


Battery	AA 1.5 V Lithium x 2, CR 2450 3 V
Number of devices connected	max. 8



Regulations

EMC Directive	CE 2004/108/EY
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 55


Type approvals

STF certificate	VTT-RTH-00063-14
ETA-Danmark	VA 1.42/20420
Sintef	Sintef Nr. 3082
KIWA SE	1462

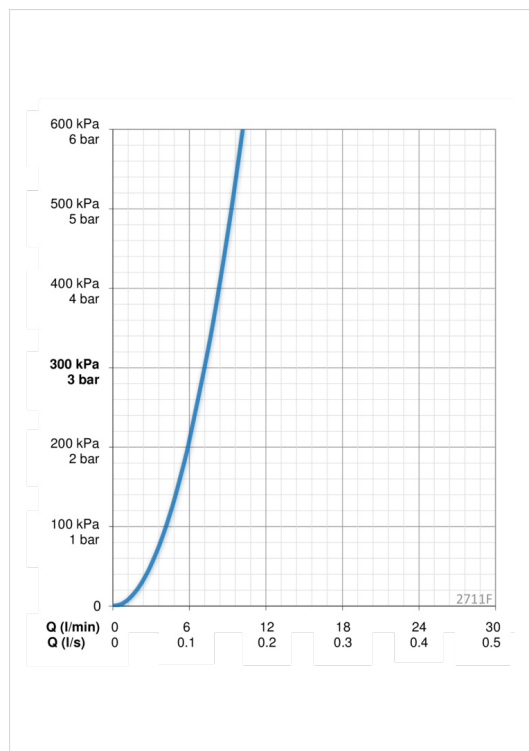

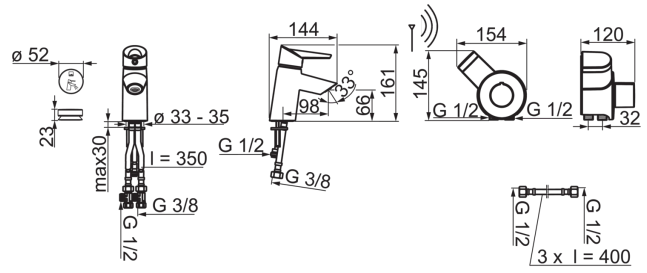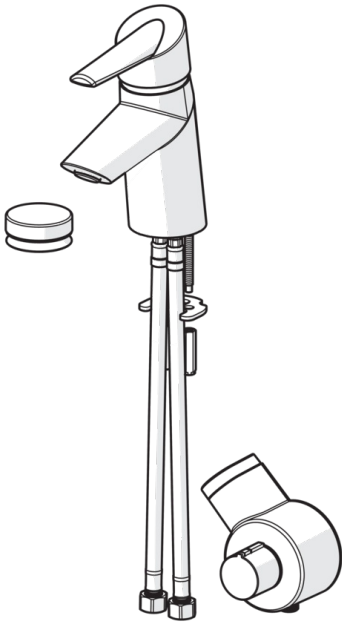

Spare parts

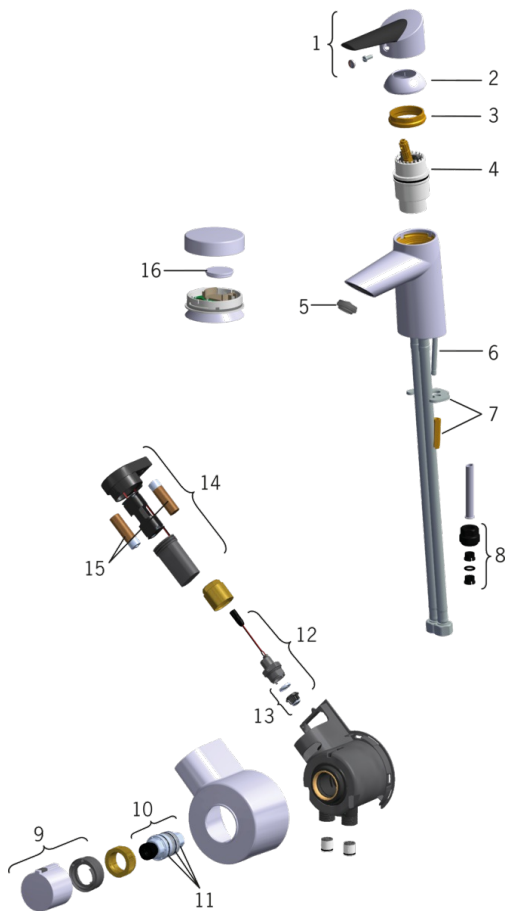

SP2711F

	Code
01	601319V
02	159053V
03	158726
04	158890
05	601500V
06	158727/10
07	158697
08	159684
09	159048V
10	178780V
11	178796V
12	601307V
13	601512V
14	601590V
15	600599V
16	601468V