



Thermostatic shower faucet

- Shower
- Thermostatic
- Wall mounted
- Chrome
- Temperature adjustment fixable
- Thermostatic cartridge that reacts quickly and precisely to changes in water temperature

Technical data

Flow properties

Flow-rate at 300 kPa	0.27 l/s
Pressure loss with flow (0.2 l/s)	165 kPa

Technical properties





Hot water supply	max. +80°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC150± 3 mm
Material	brass

Regulations


EN standard	EN 1111
Noise class	I (ISO 3822)

Type approvals

STF certificate	VTT-RTH-04949-08
ETA-Danmark	VA 1.43/17874
Sintef	Sintef Nr. 1324

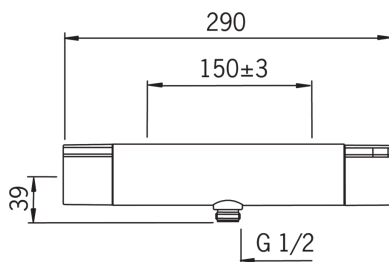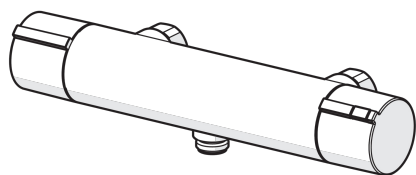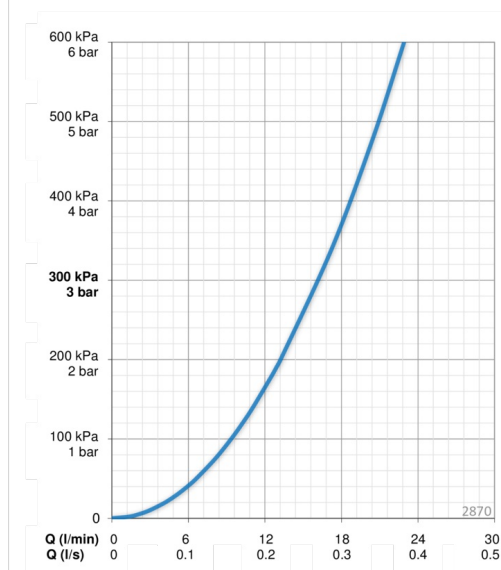

Spare parts

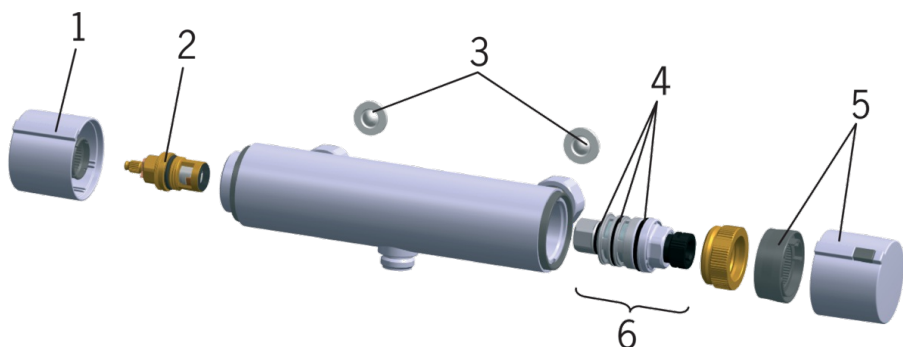

SP2870

	Code
01	159045V
02	109898
03	178375V
04	178796V
05	159048V
06	178780V