

EAN: 6414150082467

www.oras.com/en/products/oras/product/3014F



Touchless faucet with one inlet pipe for premixed or cold water. Battery-operated 6 V. The XS size (139 mm) of the faucet enables installation even in the smallest spaces. The faucet is equipped with Mikado® aerator, litter filters and non-return valves. No adjustments are needed at installation because of an advanced Autofocus sensor. Bluetooth connection enables easy monitoring and adjustments of the faucet. The impulse-controlled solenoid valve gives the battery a long operating life. Flow rate 1.5 l/min.

F = with flexible pipes

- Public & Semi-public
- Touchless, Battery-operated, Bluetooth®
- Deck mounted
- Chrome
- Autofocus sensor, Impulse-controlled solenoid valve
- 3S-installation system for safe and simple mounting

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.02 l/s
Pressure loss with flow (0.1 l/s)	210 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	100 mm
Material	brass

Software settings


Afterflow period	3 s (1-20 s)
Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)
Max. flow period	2 min (1 s-30 min)




Electronic properties

Battery	Lithium 2CR5 6 V
Bluetooth version	4.x


Regulations

EMC Directive	CE 2014/30/EU
EN standard	EN 15091
Noise class	I (ISO 3822) Oras lab.
Protection class	IP 55

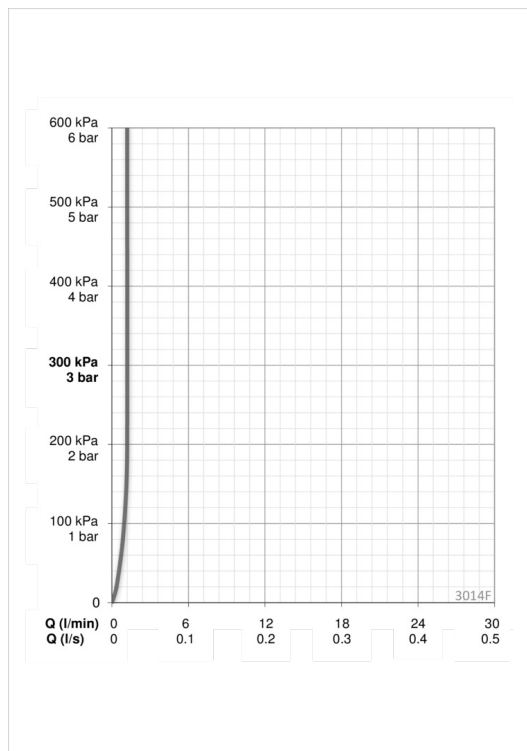

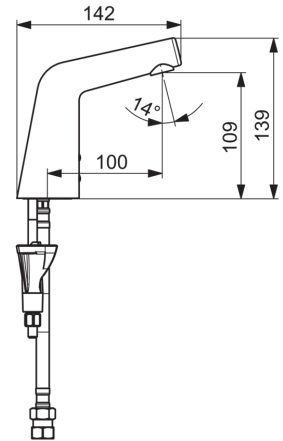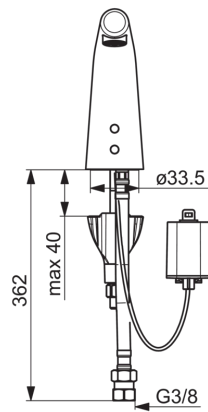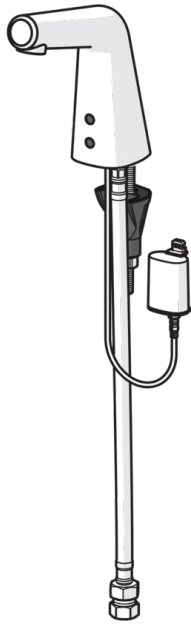

Spare parts

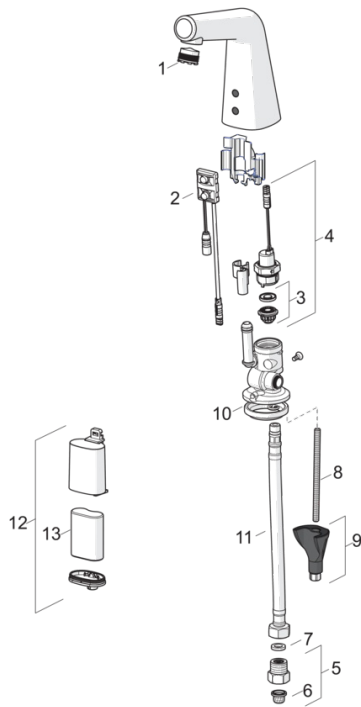

SP3014F

	Code
01	1002024V
02	1001424V
03	199205V
04	199206V
05	198473/2
06	199257/2
07	600705/10
08	1000780V
09	602610V
10	1002371V
11	601481/2
12	199438V
13	198330