Bend
Hot dip galvanized / black enamelled RAL 9005

schramm TECHTRADE

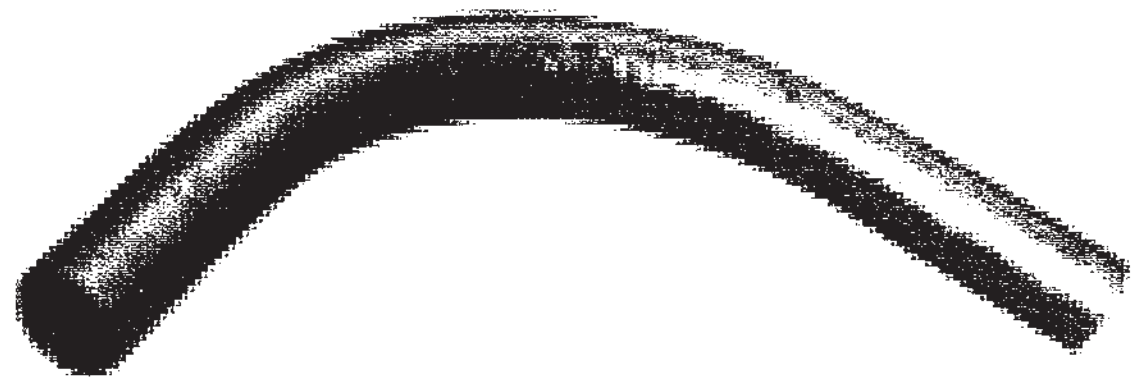

Product information – technical leaflet

Connection for galvanized / black enamelled steel pipe
both sides with thread and one with a screwed coupler

Material	mild steel rolled
Galvanized	inside and outside hot dip galvanized acc. to EN ISO 1461 or black enamelled
Approval:	VDE/ÖVE EN 61386-1 VDE/ÖVE EN 61386-21

Bend hot dip galvanized (EN ISO 1461)

Item number	*Sign*	*OD- Ø in mm*	*ID- Ø in mm*
50 5644	Bend hot dip galvanized 16 – STBV16	18	16,2
50 5645	Bend hot dip galvanized 20 – STBV20	22	20,2
50 5646	Bend hot dip galvanized 25 – STBV25	27,4	25,2
50 5647	Bend hot dip galvanized 32 – STBV32	34,4	32,2
50 5648	Bend hot dip galvanized 40 – STBV40	42,4	40,2
50 5649	Bend hot dip galvanized 50 – STBV50	52,4	50,2
50 5650	Bend hot dip galvanized 63 – STBV63	65,4	63,2

Bend black enamelled (RAL 9005)

Item number	*Sign*	*OD- Ø in mm*	*ID- Ø in mm*
50 5630	Bend black enamelled 16 – STB16	18	16,2
50 5632	Bend black enamelled 20 – STB20	22	20,2
50 5634	Bend black enamelled 25 – STB25	27,4	25,2
50 5636	Bend black enamelled 32 – STB32	34,4	32,2
50 5638	Bend black enamelled 40 – STB40	42,4	40,2
50 5640	Bend black enamelled 50 – STB50	52,4	50,2
50 5642	Bend black enamelled 63 – STB63	65,4	63,2

All dimensions without tolerances are for information only.

schramm [illegible] / Tel +43(0)732 / 30 11 12 Fax: +43(0)732/ 30 11 12-20
office@schramm.co.at | www.schramm-techtrade.com

Bankverbindung: Oberbank AG, BLZ: 15000, Kto.: 751-0640.64 / IBAN: AT52 1500 0007 5106 4064 / BIC: OBKLAT2L
VKB Bank, BLZ: 18600 / Kto.: 10.402.808 / IBAN: AT60 1860 0000 1040 2808 / BIC: VKBLAT2L
UID Nr.: ATU 47 98 86 00, EORI Nr.: ATEOS1000013574 / FN 188143g