


Steel-conduit-system Black enamelled (RAL 9005)

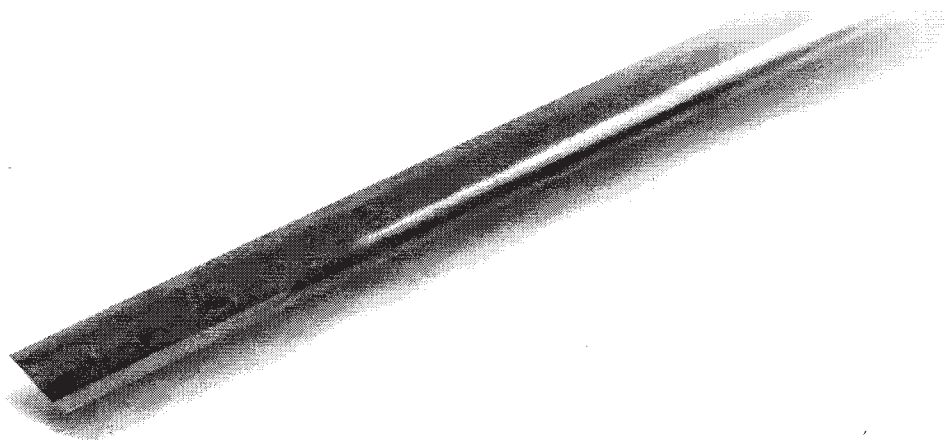

Produktinformation – technical leaflet

Material	mild steel rolled
Galvanized	inside and outside black enamelled (RAL 9005)
Approval:	VDE/ÖVE EN 61386-1 VDE/ÖVE EN 61386-21
Classification :	4 = compressive strenght (1250N/5cm) 4 = impact strenght (2kg/300m) 5 = min. temperature - 45° C 6 = max. temperature + 250° C

Steel-conduit, black enamelled, 3m length

Item number	Sign	ID-Ø in mm	OD- Ø in mm
50 5560	Steelconduit 16 black en. – ISS 16	14	16
50 5562	Steelconduit 20 black en. – ISS 20	18	20
50 5564	Steelconduit 25 black en. – ISS 25	22,6	25
50 5566	Steelconduit 32 black en. – ISS 32	29,6	32
50 5568	Steelconduit 40 black en. – ISS 40	37,6	40
50 5570	Steelconduit 50 black en. – ISS 50	47,6	50
50 5572	Steelconduit 63 black en. – ISS 63	60,40	63

*Tolerances according to DIN EN 60423