

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60209373

Customer pos. no.:

Model :

DIVERTRON 900 M

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 0,00234 MPa

Hydraulic data (duty point)



Flow :

Head :

Materials

Base	Technopolymer
Inspection cap	EPDM
Nut	Stainless Steel A2
Stage housing	Technopolymer
Wear ring	Technopolymer
Washer	Stainless Steel A2
Diffuser	Technopolymer

Curve tolerance according to ISO 9906

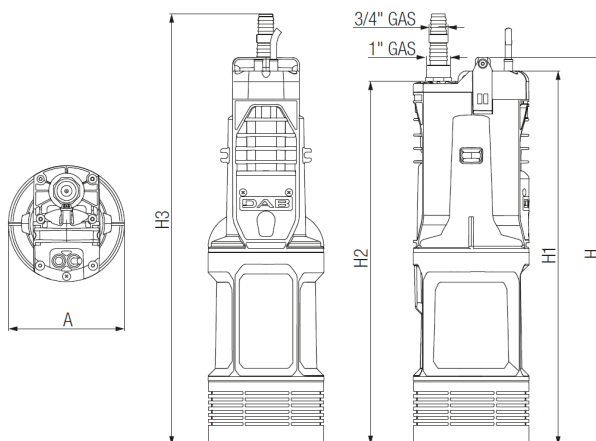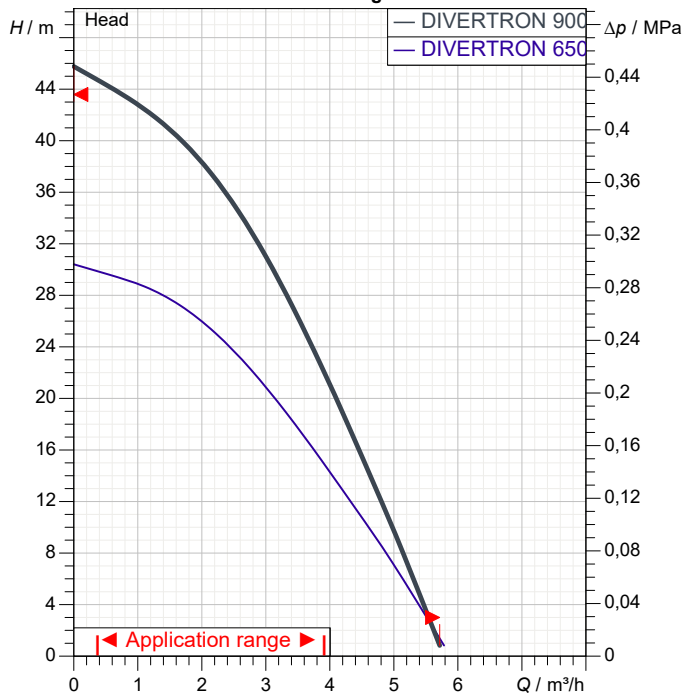

Motor data

Motor brand :

DAB

Nominal power P2 :

0,56 kW

Rated voltage :

1~ 220-240 V

Nominal current :

4,2 A

Number of poles :

2

Rated speed :

2.800 1/min

Degree of protection :

IP 68

Weight :

11 kg

Dimensions in

mm

A	160
H	536
H1	517
H2	503
H3	596

Pump connection

Suction side :

/

Discharge side :

1" G

/ --


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON 900 M

Curve tolerance according to ISO 9906

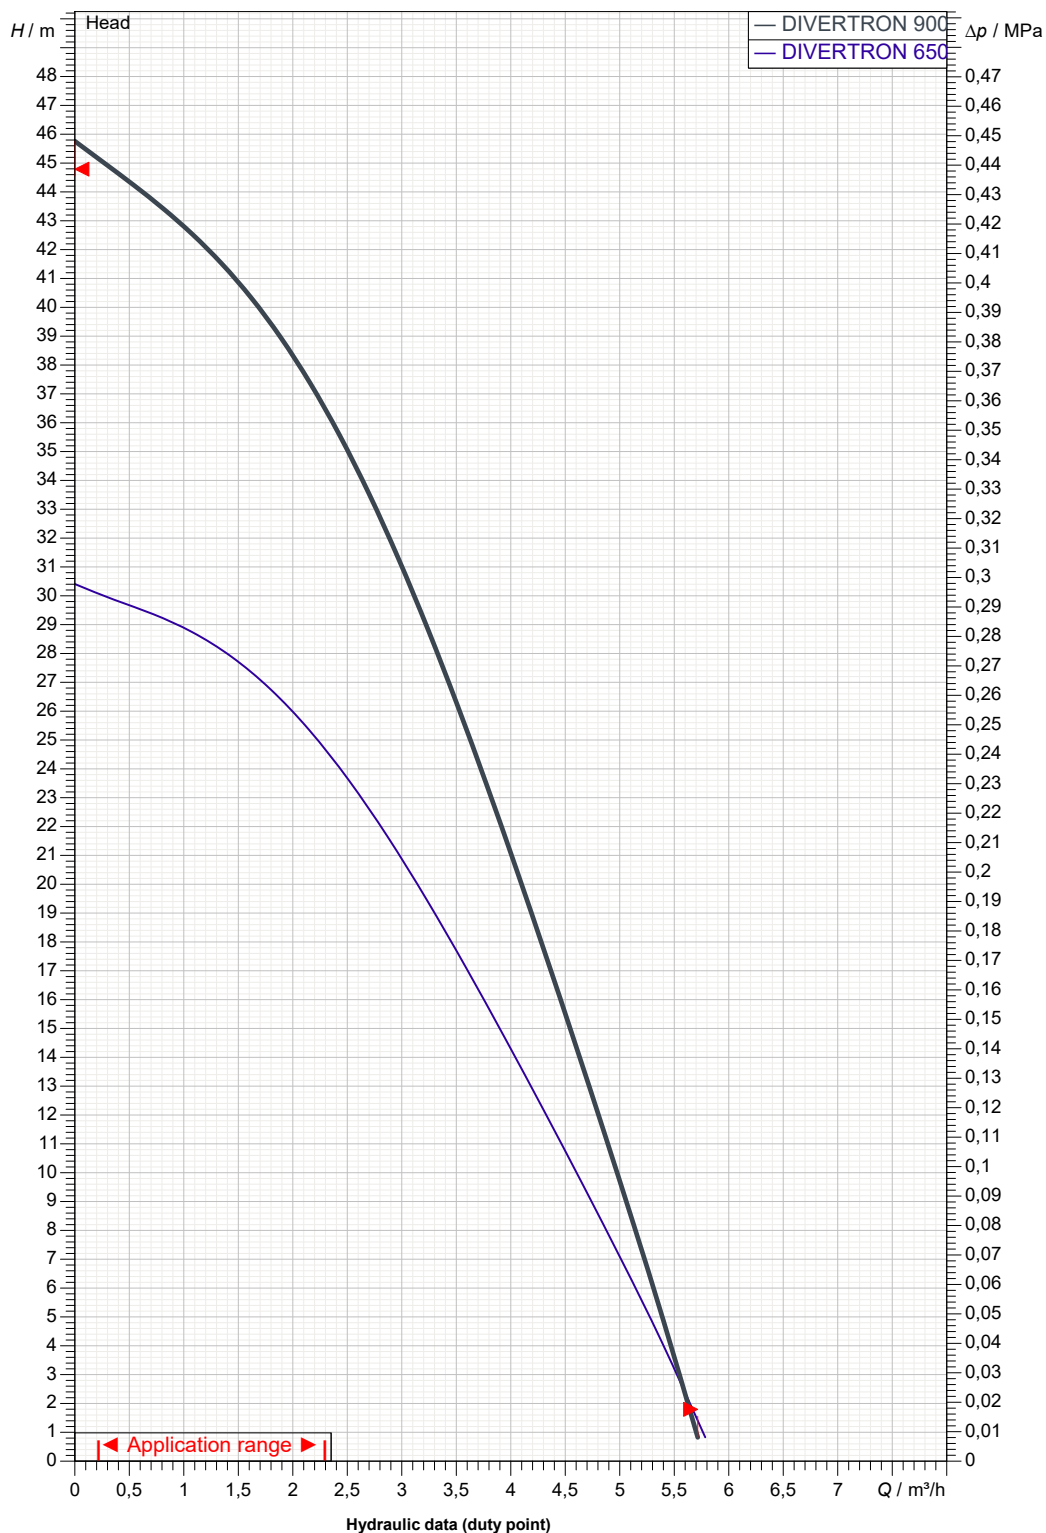

Suction side :

Discharge side :
1" G
--

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE

2022-12-12



DIMENSIONAL DRAWING

2022-12-12

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON 900 M

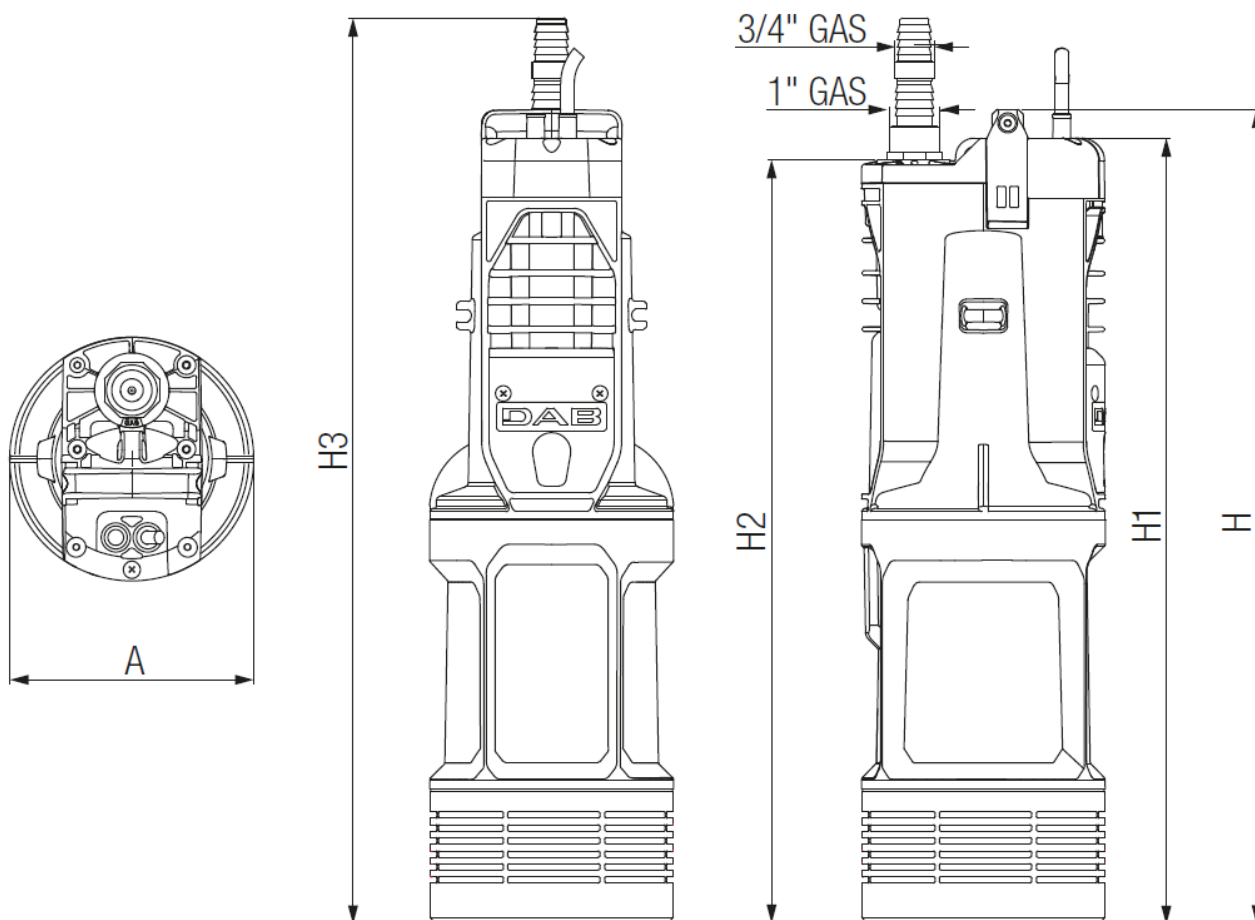

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

A
H
H1
H2
H3

160
536
517
503
596

Suction

Discharge
1" G
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE

2022-12-12