

INSULATING COVER SP 15

TECHNICAL DATA

Type	SP 15
Suitable for connectors	SM 2.1, SM 2.11 SM 2.2, SM 2.21, SM 2.25 SL 4.2, SL 4.21, SL 4.25, SL 4.26
Max conductor cross-section	120 mm ²
Test voltage	4 kV/50 Hz/1min.
Weight	30 g
Volume	0.00043 m ³

USE The cover is used with Al/Al and Al/Cu connectors as insulation and to protect the connectors against corrosion caused by climatic conditions.

CONSTRUCTION

The cover is made of weather and UV-radiation resistant special black plastic.

INSTALLATION

After installation of connector cut off necessary caps for conductors and attach the plastic cover on the connector. Be sure that:

- the cover is closed properly i.e. the locking devices are completely closed
- the cover is in upright position i.e. the openings for condensed water drainage are downwards

TOOLS REQUIRED

Knife

MARKINGS


SP 15
MAX 120 mm²

STANDARD

SFS 4644

PACKING

10 pcs in a plastic bag / 10 bags in a cardboard box

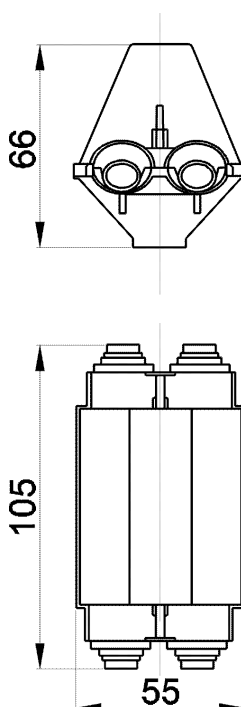

UTILITY NETWORKS

Ensto Sekko Oy
Kipinätie 1
PL 51
06101 Porvoo

Ensto Sekko Oy
Kipinätie 1
P.O. Box 51
06101 Porvoo
Finland

Tel. +358 (0) 204 76 21
Fax +358 (0) 204 76 2771
www.ensto.com

Reg. No. 166.780
Reg. office: Porvoo