

EAN: 6414150027222

www.oras.com/en/products/oras/product/6100



Touchless washbasin faucet for pre-mixed water. Fixed electrical connection 230 V. Recognition range can be adjusted at the faucet.

3, 6 and 9 meters photocell cables available:

Oras No.6100/3, 6100/6, 6100/9

- Public & Semi-public
- Touchless, External transformer
- Deck mounted
- Chrome

Technical data

Flow properties

Flow-rate at 300 kPa (with flow controller)	0.11 l/s
Pressure loss with flow (0.1 l/s)	170 kPa

Technical properties

Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G3/8
Projection	120 mm
Material	brass

Software settings

Afterflow period	1 s (0 - 255 s)
Max. flow period	2 min (1 - 255 s)

Electronic properties


Electrical Connection	230 VAC
-----------------------	----------------


Regulations

EMC Directive	CE 89/336/EEC
EN standard	EN 15091
Noise class	I (ISO 3822)
Protection class	IP 67

Type approvals

STF certificate	STF VTT-RTH-00112-11
-----------------	-----------------------------

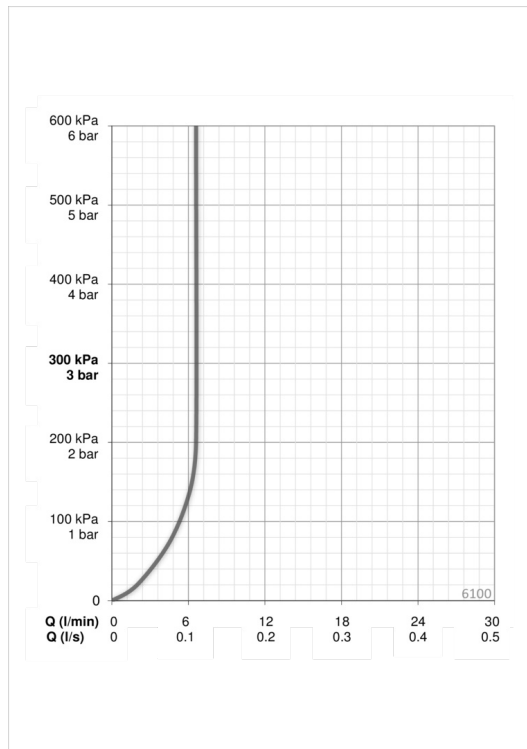

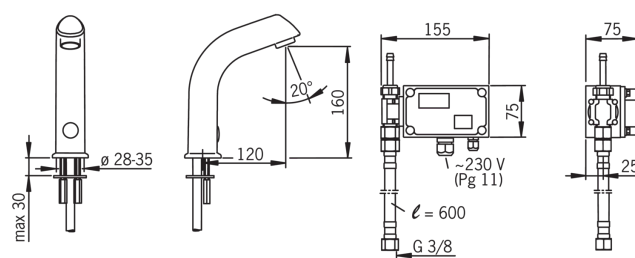

This exploded view diagram illustrates the assembly of a medical device. The components are labeled as follows:

- 1:** A black cable with a circular connector at the end.
- 2:** A small black O-ring or seal.
- 3:** A green rectangular component, possibly a sensor or display, mounted on a base.
- 4:** A grey L-shaped bracket or housing component.
- 5:** A long, curved, light blue tube or handle.
- 6:** A grey cylindrical component, likely a connector or plug.
- 7:** A grey rectangular box or housing, shown with a red square on its side.
- 8:** A small grey cylindrical component, possibly a cap or plug.
- 9:** A long, thin, light blue tube or probe.

	Code
01	198081/9
01	198081
01	198081/6
01	198081/3
02	198084
03	198085
04	198092
05	198093
06	198094/2
07	198095
08	232211
09	198008V