

EAN: 6414150065613

www.oras.com/en/products/oras/product/6370



Thermostatic shower faucet which quickly and accurately reacts on the temperature changes of input water maintaining the requested temperature. The temperature control handle is equipped with a temperature regulator which can be bypassed by pressing the button (preset to 38°C). Oras Eterna's EcoLed press pad indicates with signal lights the ideal duration of shower considering water and energy consumption and acts as a flow regulator.

The faucet is delivered with litter filters and one-way valves.

- Shower
- Battery-operated, Thermostatic
- Wall mounted
- Chrome
- Temperature control handle
- press pad with EcoLed
- Thermostatic cartridge that reacts quickly and precisely to changes in water temperature, Litter filter(s), Non-return valve(s)

Technical data

Flow properties

Flow-rate at 300 kPa	0.22 l/s
Pressure loss with flow (0.2 l/s)	250 kPa

Technical properties

Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G1/2
Installation width	CC150± 3 mm
Material	brass

Software settings

Max. flow period	4 min
------------------	--------------

Electronic properties





Battery	AA 1.5 V Lithium x 2
---------	-----------------------------

Regulations


EMC Directive	CE 2004/108/EY
EN standard	EN 1111 , EN 15091
Noise class	I (ISO 3822)
Protection class	IP 55

Type approvals

STF certificate	STF VTT-RTH-00064-12
ETA-Danmark	VA 1.43/20423
Sintef	Sintef Nr. 1805

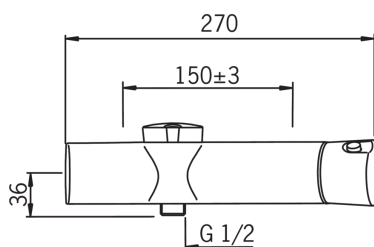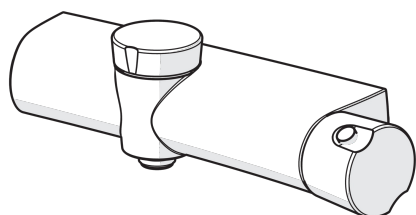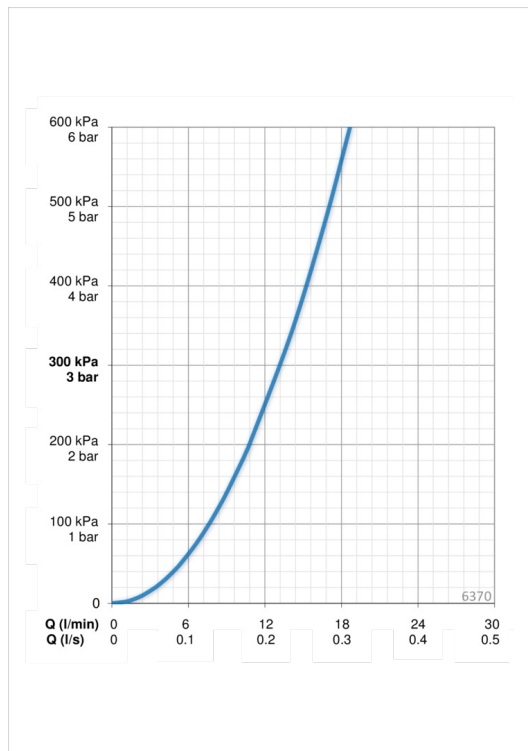

Spare parts

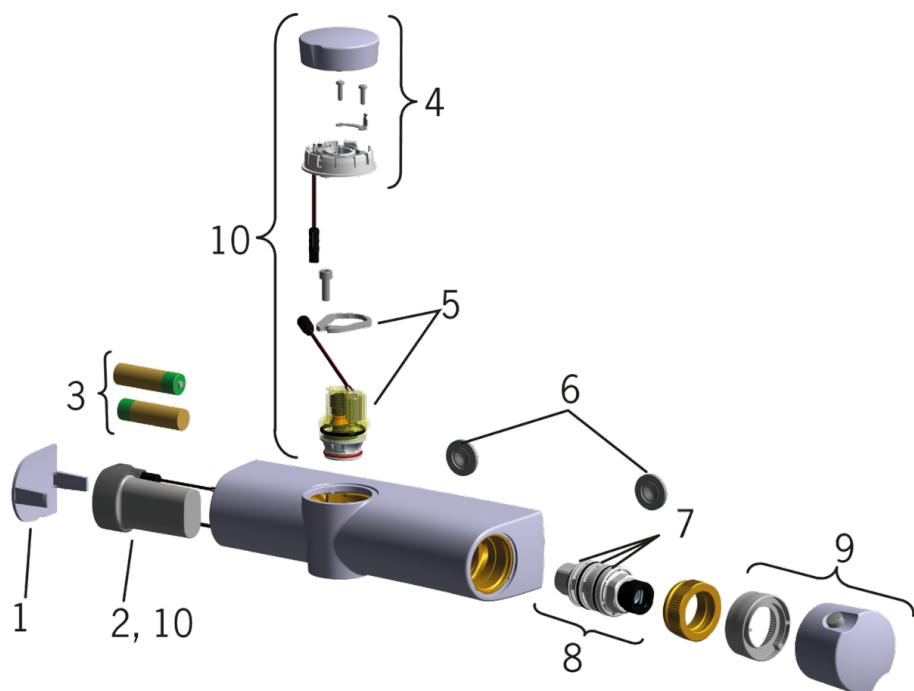

SP6370

	Code
01	600609V
02	602269V
03	600599V
04	602180V
05	602182V
06	178375V
07	178796V
08	178780V
09	600612V
10	602303V