


Data Sheet

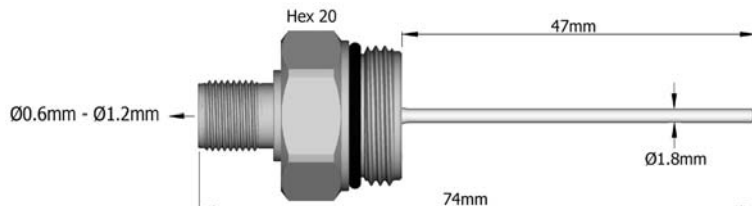

No.	70365000
Connector Type:	TELESTE: KDC313 PG11m – Ff 47mm

Band Width:	5 MHz – 2.2GHz
Impedance:	75 Ohm
Amp. Rating:	4 A
Shielding:	>90db @ 1 GHz

Temperature	
Installing:	-5 to +50 °C
Operating:	-30 to +75 °C
Sealing Test:	DS / IEC 529: IP X7

Return Loss: @ MHz, Better Than	
500:	-39 dB
860:	-32 dB
1000:	-30 dB
1750:	-27 dB

Insertion Loss: @ MHz, Better Than	
500:	-0,1 dB
860:	-0,1 dB
1000:	-0,1 dB
1750:	-0,1 dB

Tested on: HP5753D / HP85047A

Pull Strength:	
Total:	
Inner Conductor:	
Jacket:	

Dielectric Strength:	2 kV
Insulation Resistance:	(@500V): >29.99Gohm
Inner Conductor:	Resistance max. @ 1A DC: 15 mOhm

Material and Plating		
Body:	Brass	NiSn (NiTin)
Inner Cond.	Tinbronze	NiSn (NiTin)
O'rings	EPDM	
Insulators	Polycarbonat / Polyethylene	