

EAN: 6414150081750

[www.oras.com/en/products/oras/product/8223F](http://www.oras.com/en/products/oras/product/8223F)

Kitchen faucet with swivel spout, Smart press pad, Smart hand shower and aerator. Spout's swing angle is factory preset at 110°, can be limited to 60° or 85°. Smart, remote press pad opens water, pushing again closes water, safety stop after 60 seconds. Equipped with an on/off and flow rate control, and a temperature control. Red LED light illuminates the temperature control lever to indicate hot water.

Function of the Smart, remote hand shower: when lifting hand shower from the holder water starts to flow from the faucet; by pressing the trigger water comes from the hand shower.

Electrical connection with a plug transformer 230/12 V

Design: Mario Trimarchi

F = with flexible pipes

- Kitchen
- Two-grip, Plug-in transformer
- Deck mounted
- Chrome
- Swivel spout

## Technical data

### Flow properties

Flow-rate at 300 kPa	<b>0.17 l/s</b>
Pressure loss with flow (0.1 l/s)	<b>105 kPa</b>

### Technical properties

Hot water supply	<b>max. +70°C</b>
Working pressure	<b>100 - 1000 kPa</b>
Connection size	<b>G3/8</b>
Projection	<b>181 mm</b>
Material	<b>brass</b>

### Software settings


Max. flow period	<b>60 s (4-120 s)</b>
------------------	-----------------------


### Electronic properties

Electrical Connection	<b>230 / 12 V</b>
Battery	<b>CR 2450 3 V</b>


### Regulations

EMC Directive	<b>CE 2014/30/EU</b>
EN standard	<b>EN 15091</b>
Noise class	<b>I (ISO 3822) Oras lab.</b>
Protection class	<b>IP 55</b>

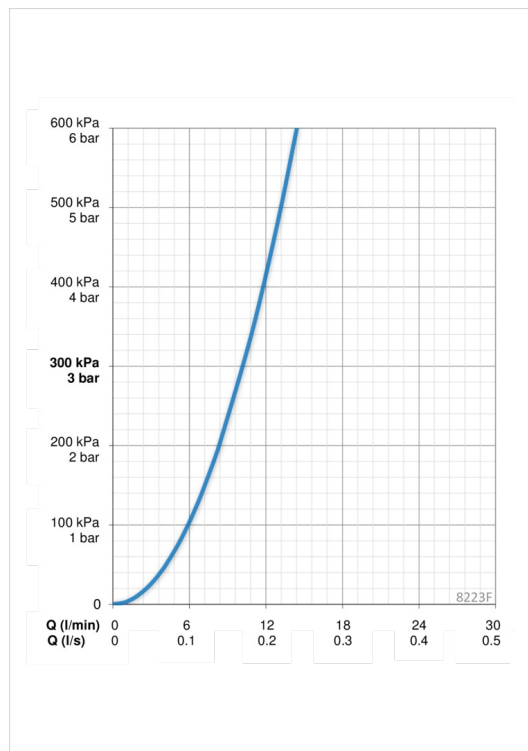

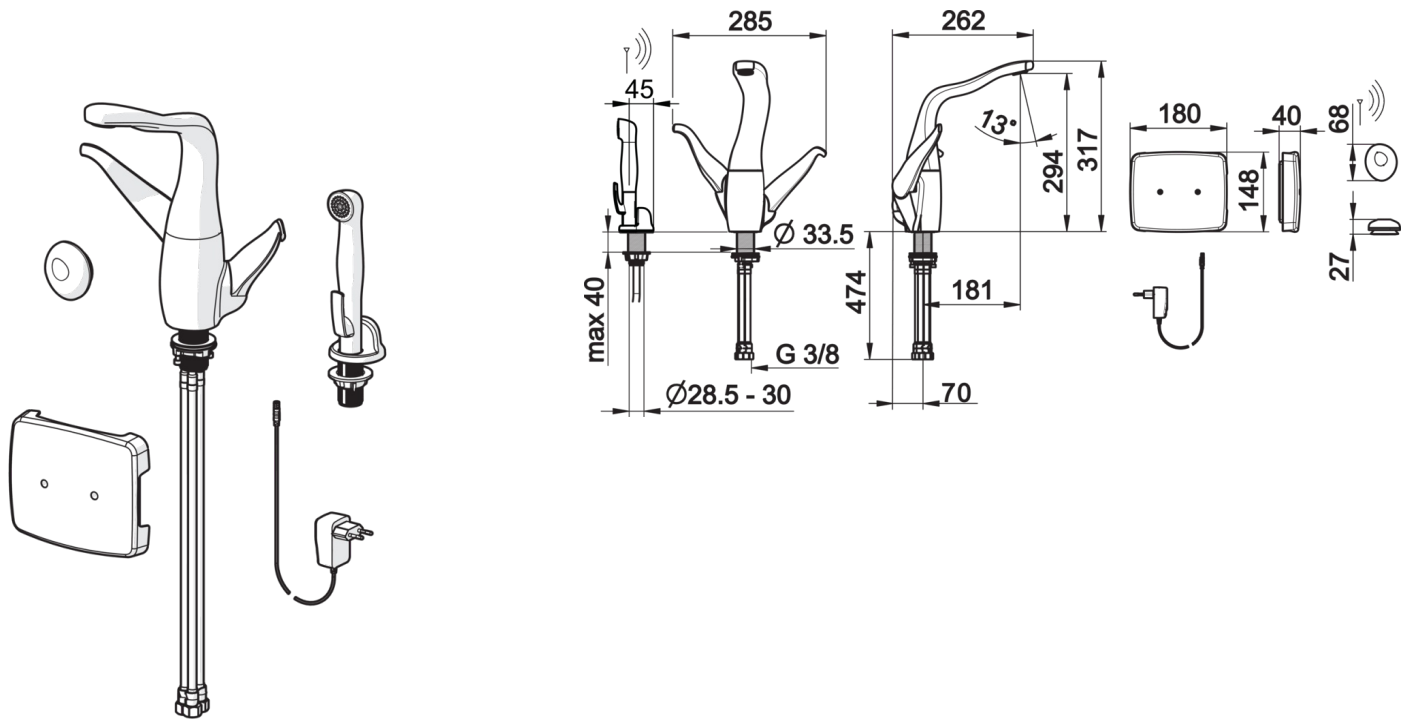

## Spare parts

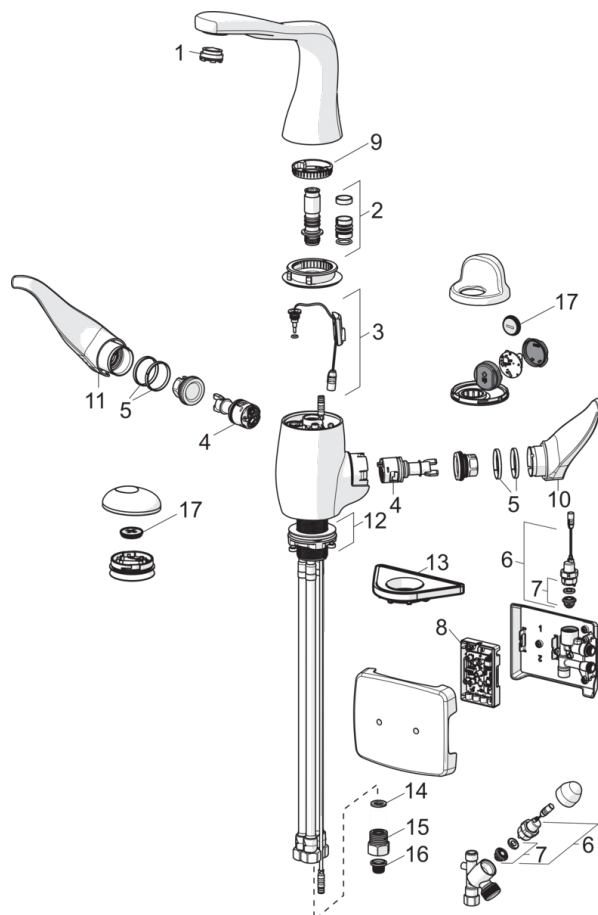

### SP8222F

	Code
01	601287V
02	198287V
03	1001729V
04	602547V
05	1001155V
06	601884V-F
07	601512V
08	1002071V
09	602560V
10	602557V
11	602558V
12	602573V
13	158825
14	600705/10
15	198473/2
16	199257/2
17	601468V