



# 8710F ALESSI Sense by Oras - Washbasin faucet, 3 V

EAN: 6414150073229

[www.oras.com/en/products/oras/product/8710F](http://www.oras.com/en/products/oras/product/8710F)



Washbasin faucet with fixed spout and a swivel aerator. Faucet is opened by pressing gently on top of it, after which the faucet is open for 6 sec. (Factory setting) By pressing on top of the faucet for one second, the faucet stays open for one minute. By pressing on top of the faucet for 4 seconds, the faucet goes into cleaning mode and remains closed for 20 seconds. Easy to use temperature control handle operates also as a flow controller. Battery operated 3 V. Design by Rodrigo Torres. F = with flexible pipes

- Bathroom
- Tiptronic, Battery-operated
- Deck mounted
- Chrome/White
- Fixed spout
- Swivel
- Temperature control handle
- Adjustable settings via magnetic key

## Technical data

### Flow properties

Flow-rate at 300 kPa (with flow controller)	<b>0.07 l/s</b>
Pressure loss with flow (0.1 l/s)	<b>200 kPa</b>

### Technical properties

Hot water supply	<b>max. +70°C</b>
Working pressure	<b>100 - 1000 kPa</b>
Connection size	<b>G3/8</b>
Projection	<b>118 mm</b>
Material	<b>brass</b>

### Software settings

Automatic flush	<b>off (off/12/24/48/72 h)</b>
Automatic flush period	<b>30 s (10-600 s)</b>
Max. flow period	<b>6 s (4 s-60 s) / 60 s (30 s- 600 s)</b>

### Electronic properties

Battery	<b>AA 1.5 V Lithium x 2</b>
---------	-----------------------------

### Regulations


EMC Directive	<b>CE 2004/108/EY</b>
EN standard	<b>EN 15091</b>
Noise class	<b>I (ISO 3822)</b>
Protection class	<b>IP 44</b>


### Type approvals

STF certificate	<b>VTT-RTH-00006-16</b>
-----------------	-------------------------




reddot award 2016  
winner

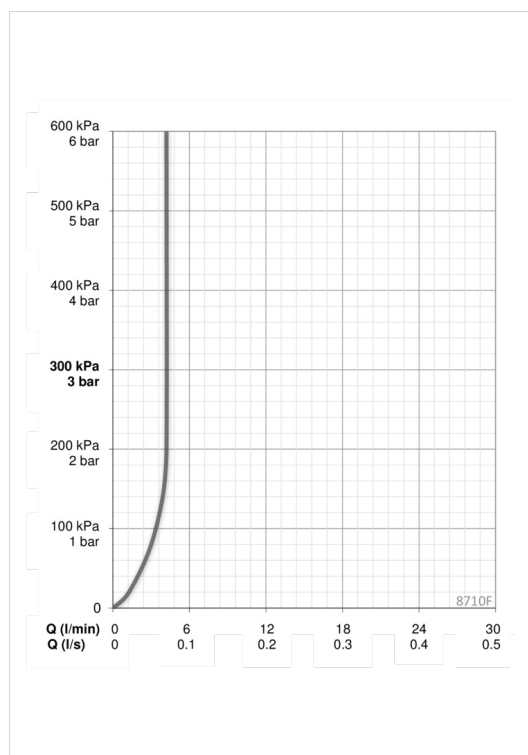

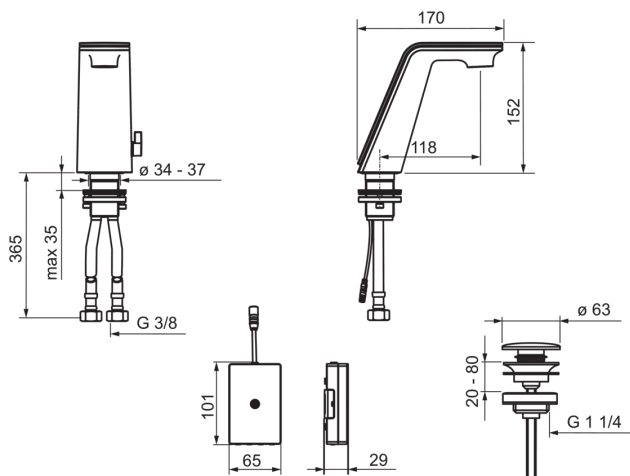

## Spare parts

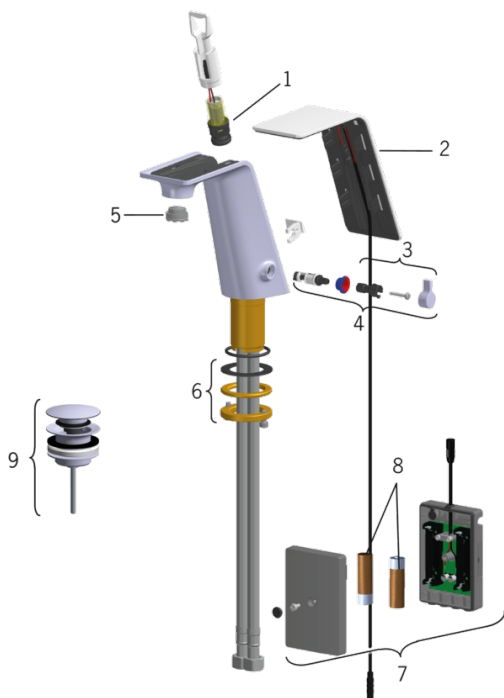

### SP8710F

	Code
01	601697V
02	601711V
03	601709V
04	601707V
05	601920V
06	859114V
07	601807V
08	600599V
09	159056V