


Data Sheet

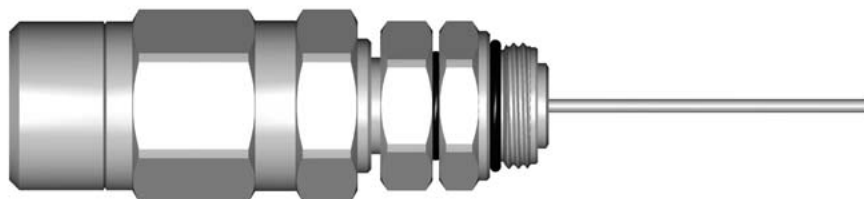

No.	36180350
Connector Type:	TELESTE: KDC420 B039-PG11MS

Band Width:	5 MHz – 2.2GHz	Temperature	
Impedance:	75 Ohm	Installing:	-5 to +50 °C
Amp. Rating:	15 A	Operating:	-30 to +85 °C
Shielding:	>105db @ 900 MHz	Sealing Test:	DS / IEC 529: IP X7

Return Loss: @ MHz, Better Than		Insertion Loss: @ MHz, Better Than	
500:	30 dB	500:	-0,1 dB
860:	27 dB	860:	-0,1 dB
1000:	26 dB	1000:	-0,1 dB
1750:	26 dB	1750:	-0,1 dB

Pull Strength:		Dielectric Strength:	2 kV
Total:	50 kg	Insulation Resistance:	(@500V): > 30 Gohm
Inner Conductor:	X kg	Inner Conductor:	Resistance max. @ 1A DC: 0.5 mOhm
Jacket:	X kg		

Material and Plating		
Body:	Brass	NiSn (NiTin)
Inner Cond.	Brass	NiSn (NiTin)
O'rings	EPDM	
Insulators	Polycarbonat / Polyethylene	

Tested on: HP5753D / HP85047A