


Data Sheet

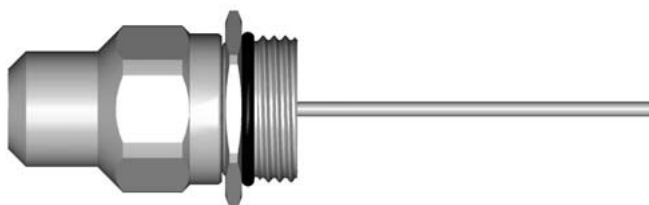

No.	66360050
Connector Type:	TELESTE: PG11M-R75 PG11m-75term. AC/DC Blocking

Band Width:	5 MHz –1.0 GHz	Temperature	
Impedance:	75 Ohm	Installing:	-5 to +50 °C
Amp. Rating:		Operating:	-30 to +75 °C
Shielding:	>110db @ 1 GHz	Sealing Test:	DS / IEC 529: IP X7

Return Loss: @ MHz, Better Than		Ratings	
350:	-30 dB	Power continuous:	0.25 W max.
500:	-30 dB	Operating AC voltage:	90 V (@ 60 Hz)
800:	-30 dB	Maximum AC voltage:	2.500 V (@ 60 Hz)
1000:	-30 dB		

Material and Plating		
Body:	Brass	NiSn (NiTin) / Sn
Inner Cond.	Brass	NiSn (NiTin)
O'rings	EPDM	
Insulators	Polyethylene	

Tested on: HP5753D / HP85047A