


FLAMEBLOCKER

EXQ LIGHT EVO 300/500V

Based on SS 424 02-19-5
ZN-TF-219



Halogen-free light sheathed cables with improved fire behaviour

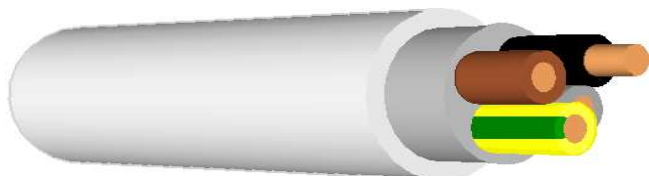

CONSTRUCTION

Conductors:	annealed copper solid class 1 acc. to EN 60228
Insulation:	cross-linked polyethylene XLPE
Inner covering:	halogen-free not vulcanized rubber compound
Sheath:	special halogen-free thermoplastic compound

CHARACTERISTIC

Colour of sheath:	white (other colours available at customer request)
Core identification:	(other colours available at customer request)
1-core	green-yellow
2-core:	blue, brown
3-core:	green-yellow, blue, brown
4-core:	green-yellow, brown, black, grey
4-core*:	green/yellow, blue, brown, black
5-core:	green-yellow, blue, brown, black, grey
7-core:	green-yellow, other cores black with numbering
* For certain applications only.	
Maximum conductor operating temperature:	+70°C
Lowest ambient temperature for fixed installation:	-30°C
Lowest installation temperature:	-15°C
Maximum short-circuit conductor temperature:	+250°C
Minimum bending radius:	
Normal use:	8 x D
Careful bending at termination:	4 x D, D – overall diameter
Max. permissible tensile stress with cable grip for Cu-conductor:	50 N/mm ²
Test voltage:	2000V

FIRE PERFORMANCE

▪ Flame retardant:	IEC 60332-1-2, IEC 60332-3-24 (SS 4241475 F4C), IEC 60332-3-23 (SS 4241475 F4B)
▪ Smoke density:	EN 61034-2, IEC 61034-2
▪ Gases evolved during combustion:	IEC 60754-1, IEC 60754-2, EN 50267-2-2: pH ≥ 4,3; conductivity ≤ 10 μS/mm
▪ CPR – class reaction to fire (acc EN 50575):	B2ca-s1a,d0,a1

EXQ Light EVO-JW-22-05-2017_B2ca

FLAMEBLOCKER

EXQ LIGHT EVO 300/500V



Based on SS 424 02-19-5

ZN-TF-219

APPLICATIONS

Installation cables for industrial complexes, public buildings, hotels, airports, hospitals or industrial plants with high concentration of people and/or property. Usable in the open, in dry, damp and wet environments in the open and concealed, as well as in masonry and in concrete, not suitable for imbedding in solidified – or compressed – concrete.

Standard length cable packing

100 m coils or 500 m on drums.

Other forms of packing and delivery are available on request.

Number and cross-sectional area of conductor	Minimum number of wires in conductor	Nominal thickness of insulation	Nominal thickness of sheath	Approximate overall diameter	Approximate net weight of cables	Maximum conductor resistance at temperature 20°C	Minimum insulation resistance at 70°C
n x mm ²	n	mm	mm	mm	kg/km	Ω/km	MΩ. km
1G2,5	1	0,5	1,2	5,1	47	7,41	0,007
2x1,5	1	0,5	1,2	7,7	68	12,1	0,008
3G1,5	1	0,5	1,2	8,1	109	12,1	0,008
3G2,5	1	0,5	1,2	8,9	146	7,41	0,007
4G1,5	1	0,5	1,2	8,7	130	12,1	0,008
4G2,5	1	0,5	1,2	9,6	176	7,41	0,007
5G1,5	1	0,5	1,2	9,4	153	12,1	0,008
5G2,5	1	0,5	1,2	10,4	210	7,41	0,007
7G1,5	1	0,5	1,2	10,1	189	12,1	0,008

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which TELE-FONIKA Kable assumes legal responsibility. TELE-FONIKA Kable reserves rights to introduce changes to the document at any time.

EXQ Light EVO-JW-22-05-2017_B2ca

TELE-FONIKA Kable S.A.

www.tfkable.com