




Product Data Sheet

ATS608

8-way input expander, plug-in, Advisor Advanced

8-way plug-in input expander

The ATS608 offers a 8-way input expansion to Advisor Advanced panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB. The ATS608 provides for 8 additional inputs available through screw terminals. Inputs are assigned to zones through configuration in the control panel. The zone type is defined through the zone menu in the main control panel.

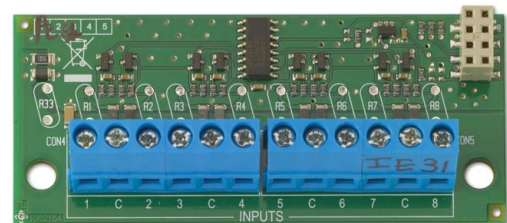

Standard Features

- 8 inputs
- Plug-in to Advisor Advanced panels
- Supports shock sensors

ATS608

8-way input expander, plug-in, Advisor Advanced

Specifications

| | |
|------------------------|--------------------------------------|
| Power supply | 10.5 - 13.8 VDC (from control panel) |
| Current consumption | 10 mA |
| End-of-line resistor | Configurable through control panel |
| Operating temperature | 0 to +50°C |
| Humidity | 95% non-condensing |
| Dimensions (w x h x d) | 40 x 80 x 18 mm |

Ordering Information

| Part No. | Description |
|-------------|---|
| ATS608 | 8-way input expander, plug-in, Advisor Advanced |
| ATS1000A-SM | Advisor Advanced ATS1000A control panel in small metal housing, EN grade 2, 8 - 32 zones, 4 areas, 1A PSU, multi-lingual. Wired or wireless (hybrid) using plug-in or remote DGP's. Max 8 keypads/readers and 7 DGP's. Different housings available |
| ATS1000A-MM | Advisor Advanced ATS1000A control panel in medium metal housing, EN grade 2, 8 - 32 zones, 4 areas, 1A PSU, multilingual. Wired or wireless (hybrid) using plug-in or remote DGP's. Max 8 keypads/readers and 7 DGP's. Different housings available |
| ATS2000A-MM | Advisor Advanced ATS2000A control panel in medium metal housing, EN grade 2, 8 - 64 zones, 8 areas, 2A PSU, multilingual. Wired or wireless (hybrid) using plug-in or remote DGP's. Max 8 keypads/readers and 7 DGP's. Different housings available |
| ATS626 | 16-way output expander, plug-in, Advisor Advanced |

