

1.3 MPX HD Indoor Dome ONVIF/PSIA


TVD-M1210V-2-P

Specifications

<b>Camera</b>	
Sensor:	1.3 MPx 1/3" Progressive Scan CCD
Day/Night:	Digital D/N
IP Compression/Standard:	H.264 PSIA/ONVIF
Maximum Resolution (@ FPS):	1280 X 960 (12,5 FPS)
Maximum Real Time Resolution (@ FPS):	1280 X 720 (25 FPS)
Dual Streaming:	Yes
Video Bit Rate:	32 Kbps to 8 Mbps, adjustable
Sensitivity:	0.45 Lux (Color)
S/N Ratio:	> 50 dB
Auto Exposure (shutter):	1/25s to 1/100,000s
Composite Output (BNC):	PAL, 1.0 Vp-p @ 75 ohm
Lens :	2.7-9mm, F1.4 Autoiris
<b>Electrical</b>	
Voltage Input:	12 VDC PoE (IEEE 802.3af)
Power Consumption:	7.5 Watts
I/O Connection:	Terminal Plug RJ45
<b>Network</b>	
Network Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTCP, PPPoE, SMTP, NTP
Ethernet/IP:	CoS 802.1 p/Q, QoS, IPv4
PoE IEEE:	802.3af
<b>LocalStorage</b>	
Media:	SDHC (Secure locked card slot)
Capacity:	Up to 32GB
<b>Audio G.711</b>	
Input:	1 ch. 3.5 mm audio interface(2.0 - 2.4 Vp-p, 1 kOhm)
Output:	1 ch. 3.5 mm audio interface(Line level, 600 Ohm)
Audio Bitrate:	16Kbps
<b>Camera Analytics</b>	
Motion Detection:	On-board 396 zones per camera
Privacy Masking:	On-board 396 zones per camera
<b>Alarm</b>	
Alarm Input:	2
Alarm Output:	2 Form C alarm relay
I/O Connection:	Terminal Plug
<b>Mechanical/ Environmental</b>	
Dimensions:	140 x 120 mm (5.5 x 4.7 in.)
Weight:	1.3kg (2.8lbs)
Storage Temperature:	-20 to 70°C (-4 to 158°F)
Operating Temperature:	-10°C to 60°C (14 to 140°F)
Environmental Rating:	Indoor Vandal-Resistant
<b>PC Requirements</b>	
Intel-based PC:	1 Ghz or faster
Memory:	1 GB RAM
Operating System:	Windows® XP, Vista or 7
CGI:	Direct X 9.0 or later
Browser:	Microsoft Internet Explorer 6.0 or later



- Maximum Resolution: 1280x960 @ 12.5 fps
- Maximum Real Time Resolution: 1280x720 @ 25 fps (HD)
- Designed to PSIA and ONVIF open standards
- H.264 compression with dual streaming functionality
- Edge recording up to 32GB SDHC card
- 1/3" CCD image sensor
- Digital D/N
- 0.45 Lux (Color)
- Motion detection (396 zones)
- Privacy masking (396 zones)
- 2 Input/Output

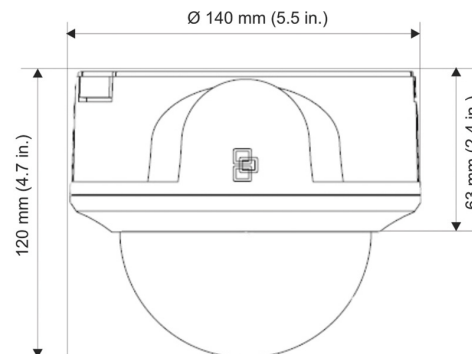

Ordering Information

TVD-M1210V-2-P 1.3 MPX HD Indoor Dome ONVIF/PSIA