


VSG 11

Stop end, polyamide, RAL 7035, Pg11



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

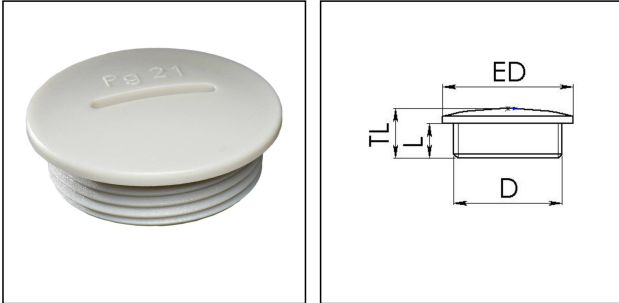

| | |
|---------------------------------|-----------------------------|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Protection class | IP56 |
| Advice | with sealing IP66/IP68 |
| Thread type | PG |
| Ø Connection thread D | 11 |
| Length screw-in thread L | 6 mm |
| Total length TL | 10 mm |
| External diameter ED | 22 mm |
| Product Color | RAL 7035 |
| Order no. RAL 7035 | 50060730 |
| Type | VSG 11 |
| Packing unit | 100 |
| ETIM-Classification | EC000032 |

Recommended accessories

| | |
|---------------|----------|
| MUG 11 | 10060672 |
| ADR 11 | 10061421 |

08.02.2021

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com