


## VSG 36

Stop end, polyamide, RAL 7035, Pg36



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

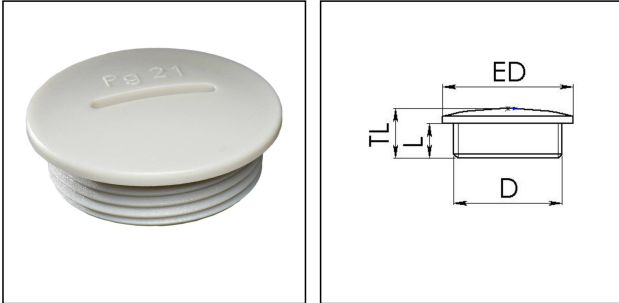

|                                 |                             |
|---------------------------------|-----------------------------|
| <b>Material</b>                 | Polyamide, fibre reinforced |
| <b>Temp. range min</b>          | -40 °C                      |
| <b>Temp. range max</b>          | 100 °C                      |
| <b>Protection class</b>         | IP56                        |
| <b>Advice</b>                   | with sealing IP66/IP68      |
| <b>Thread type</b>              | PG                          |
| <b>Ø Connection thread D</b>    | 36                          |
| <b>Length screw-in thread L</b> | 10 mm                       |
| <b>Total length TL</b>          | 15 mm                       |
| <b>External diameter ED</b>     | 55 mm                       |
| <b>Product Color</b>            | RAL 7035                    |
| <b>Order no. RAL 7035</b>       | 50060735                    |
| <b>Type</b>                     | VSG 36                      |
| <b>Packing unit</b>             | 25                          |
| <b>ETIM-Classification</b>      | EC000032                    |

### Recommended accessories

|               |          |
|---------------|----------|
| <b>MUG 36</b> | 10060677 |
| <b>ADR 36</b> | 10061426 |

08.02.2021

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com