



## LED Driver - dimmable (Triac), 4.5-10W

### Technical data

Primary voltage	220-240 VAC
Secondary voltage	15-20 Vdc
Secondary amperage	500mA
Min. load	4,5W
Max. load	10W
Efficiency	0.85
Dimmable	Yes, Triac
Dimensions driver	30 x 45 x 96 mm
Possibility of through wiring	Yes, 2 x 3G1,5
IP-class	IP20
Insulation class	Class II
Fuse	Built-in thermal fuse with auto reset
Material	Plast
Warranty	2 years



\*The drawing is not drawn to scale

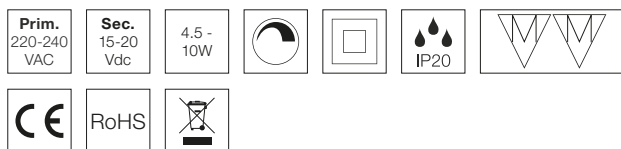

### Produktinformation

- Approved for installation directly in insulation and flammable materials
- Built-in thermofuse with auto reset
- Quick and easy installation
- May only be used with Velia and Velia PRO

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	our
98544013	5704629000902	White	Triac