

Keyword:
Lithium Xtra

Model: **SL-750**

Performance Data **Size ½AA**
(Typical values for batteries stored at 25 °C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.1 Ah
Nominal current	0.6 mA
Max. continuous discharge current	20 mA
Pulse current capability	60 mA
Anode surface area	6 cm ²
Lithium content	0.35 g
Weight	9 g
Volume	4.3 cm ³
Temperature range	-55...+85 °C

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +25 °C

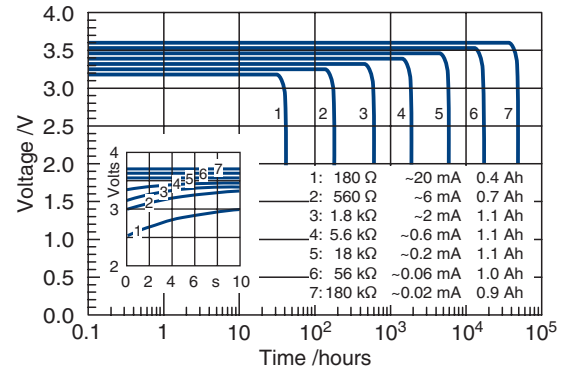


Available Capacity

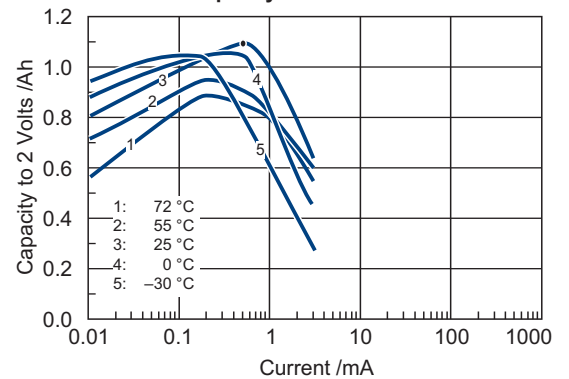


Operating Voltage

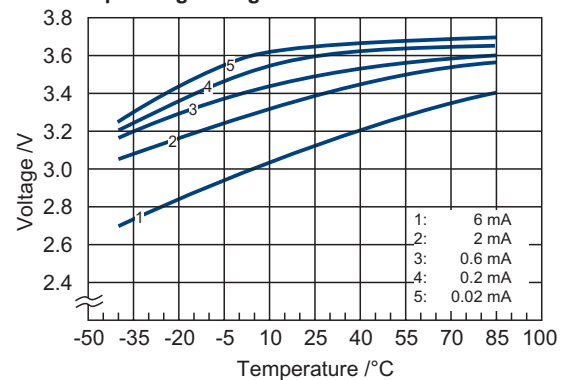


Pulse Discharge Characteristics at +25 °C

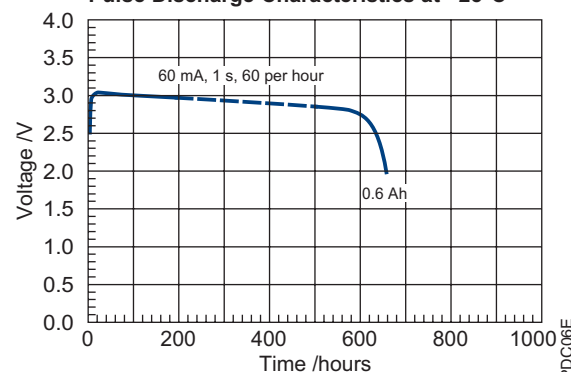


SL-750/S




SL-750/T




SL-750/P

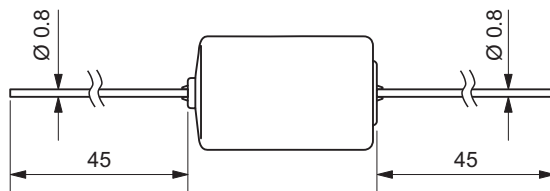

SL-750/PR



SL-750/PT



Available Terminations

SL-750/S	Standard
SL-750/T	Tags
SL-750/P	Pins
SL-750/PR	Pins Radial
SL-750/PT	Polarized Tags

Catalogue No.

11 1 07501 00
11 1 07502 00
11 1 07503 00
11 1 07506 00
11 1 07508 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.